


YAMAHA

COMBO SYNTHESIZER

CS-15

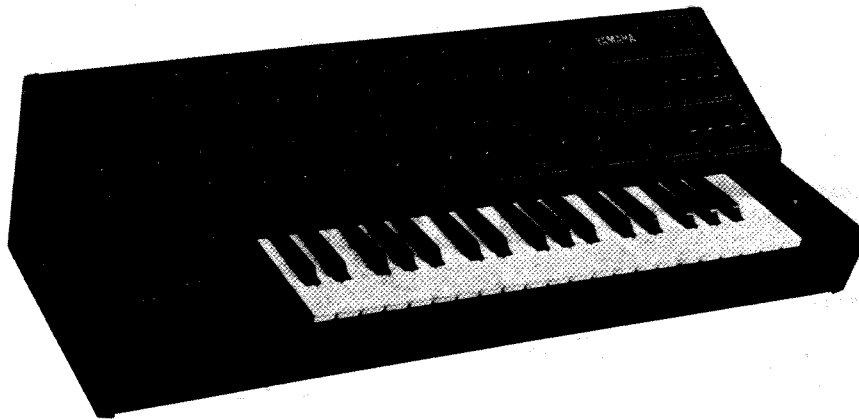


SERVICE MANUAL

CONTENTS


	Coding Guide	2
	Disassembly Procedure	3
	Specifications	4
	Panel Layout.....	5
SSK	Circuit Diagram.....	6
SSK	Circuit Board	7
CPA	Circuit Diagram.....	8
CPA	Circuit Board	9
CPB	Circuit Diagram.....	10
CPB	Circuit Board	11
PN1	Circuit Diagram & Circuit Board	12
REG	Circuit Diagram & Circuit Board	13
Key Switch	Circuit Diagram.....	14
REAR PANEL	Circuit Diagram & Circuit Board	15
	Electrical Checks & Adjustments	16
PARTS LIST	Exploded View	22
	Mechanical Parts	23
	Circuit Boards and Electrical Parts	25

CODING GUIDE


1 Wiring Notation

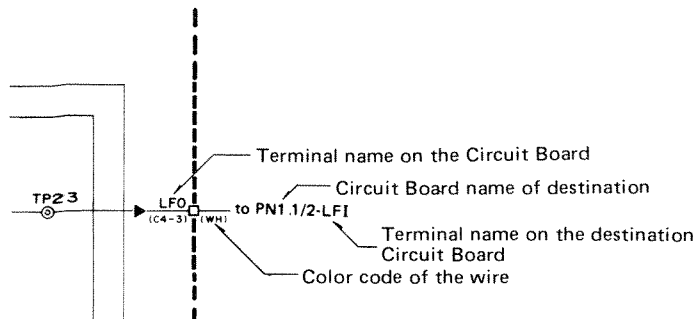

Note: Types of wire



2 Symbol Description

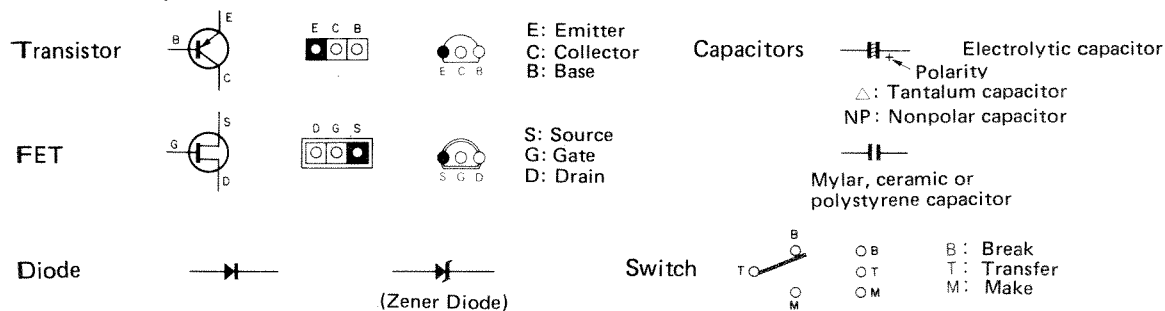

3 Abbreviations of Wire Color Codes

BLACK (クロ).....BL	BROWN (チャ).....BR	RED (アカ).....RE
ORANGE (ダイ).....OR	YELLOW (キイ).....YE	GREEN (ミド).....GR
BLUE (アオ).....BE	VIOLET (ムラ).....VI	GRAY (ハイ).....GY
WHITE (シロ).....WH	GRASS GREEN (クサ).....GG	SKY BLUE (ソラ).....SB
PINK (モモ).....PK	TRANSPARENT (トウメイ).....TR	

4 Relation of Color Coding and Notes

C	C≠	D	D≠	E	F	F≠	G	G≠	A	A≠	B
BR	RE	OR	YE	GR	BE	VI	GY	WH	GG	SB	PK
(チャ)	(アカ)	(ダイ)	(キイ)	(ミド)	(アオ)	(ムラ)	(ハイ)	(シロ)	(クサ)	(ソラ)	(モモ)

5 Logic Symbols

	MIL	YAMAHA
NOT		
NOR		
NAND		

OR

Truth Table

A	B	Y
L	L	L
H	L	H
L	H	H
H	H	H

NOR

Truth Table

A	B	Y
L	L	H
H	L	L
L	H	L
H	H	L

Exclusive OR
(排他的論理和)

Truth Table

A	B	Y
L	L	L
H	L	H
L	H	H
H	H	L

AND

Truth Table

A	B	Y
L	L	L
H	L	L
L	H	L
H	H	H

NOT
(Inverter)

Truth Table

A	Y
L	H
H	L


NAND

Truth Table

A	B	Y
L	L	H
H	L	H
L	H	H
H	H	L


DISASSEMBLY PROCEDURE

1. Panel

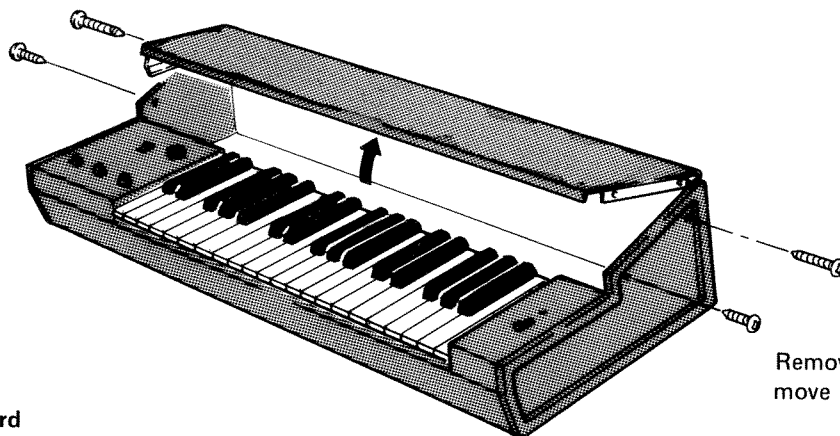


Remove the screws illustrated and move the panel up around.

2. Keyboard

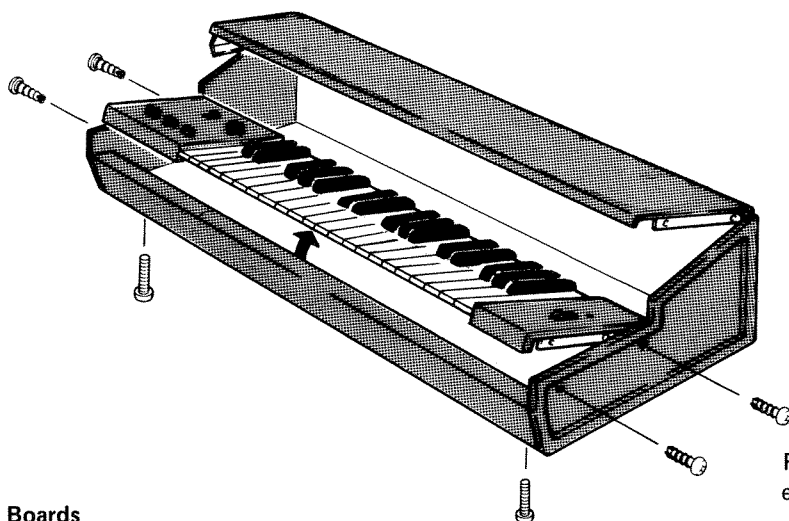

Remove the panel and screws illustrated. Then lift the keyboard around.

3. Circuit Boards

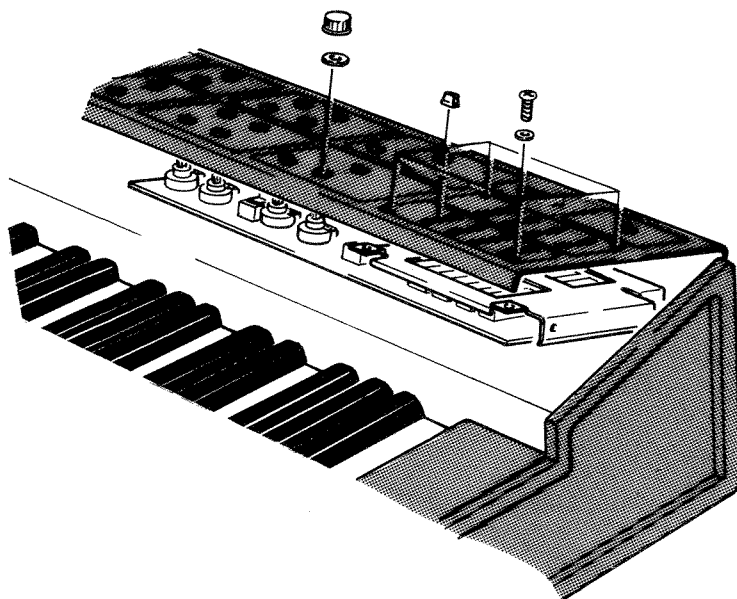

Remove the knob and hex nut of each control carefully so that the panel will not be damaged. (Remove the screws of EG for the CPB Circuit Board.) Then remove the Circuit Boards gently from the panel.

SPECIFICATIONS

KEYBOARD

37 keys, 3 octaves

CONTROLS

EXTERNAL	TRIGGER LEVEL Control EXT/NOISE Switch
LFO	SPEED Control: 0.1 to 100Hz Waveform Selector: $\sim$ / $\wedge$ / S/H
PITCH	TUNE Control: -75 to +75 cents VCO 2 DETUNE Control: -750 to +850 cents
GLIDE	TIME Control: Max. 15 sec. VCO 1 DEPTH: -750 to +550 cents VCO 2 DEPTH: -750 to +550 cents
VCO 1	FEET Switch: 64', 32', 16', 8', 4', 2' WAVE Selector: $\wedge$ / $\wedge$ / $\square$ LFO MOD Control: -1,000 to +700 cents PW Control: 50 to 90% PWM Control: 35 to 80%
VCO 2	FEET Switch: 64', 32', 16', 8', 4', 2' WAVE Selector: $\wedge$ / $\wedge$ / $\square$ LFO MOD Control: -1,000 to +700 cents PW Control: 50 to 90% PWM Control: 35 to 80%
MIXER 1	EXT/NOISE Control VCO 1 Control
MIXER 2	VCO 1 Control VCO 2 Control
VCF 1	CUT OFF FREQ Control RESONANCE Control: Q = 0.5 to 10 LFO MOD Control: ± 3 octaves EG DEPTH Control: Max. 10 octaves Filter Selector: HPF/BPF/LPF HPF 12 dB/oct. BPF 6 dB/oct. LPF 12 dB/oct.
VCF 2	EG Selector: EG 1+/EG 1-/EG 2+ CUT OFF FREQ Control RESONANCE Control: Q = 0.5 to 10 LFO MOD Control EG DEPTH Control: Max. 10 octaves Filter Selector: HPF/BPF/LPF HPF 12 dB/oct. BPF 6 dB/oct. LPF 12 dB/oct.
VCA 1	EG Selector: EG 1+/EG 2+/EG 2- LFO MOD: AM modulation, max. 90% INITIAL LEVEL Control EG DEPTH Control
VCA 2	EG Selector: EG 1/EG2 LFO MOD: AM modulation, max. 90% INITIAL LEVEL Control EG DEPTH Control EG Selector: EG 1/EG 2

EG 1	Trigger Selector: EXT/KBD Time Switch: NORMAL/TIME x 5 ATTACK TIME: 0.0025 to 2.5 sec. DECAY TIME: 0.005 to 6 sec. SUSTAIN LEVEL: 0 to 10V RELEASE TIME: 0.005 to 6 sec.
EG 2	Time switch: NORMAL/TIME x 5 ATTACK TIME: 0.0025 to 2.5 sec. DECAY TIME: 0.005 to 6 sec. SUSTAIN LEVEL: 1 to 10V RELEASE TIME: 0.005 to 6 sec.
OUTPUT	VOLUME control
PORTAMENTO	Max. 3.5 sec.
BRILLIANCE	VCF Selector: 1/1 + 2/2 Control Lever: - to 0 to +
PITCH BEND	Variable Range: N/M/W N (Narrow) ± 200 cents M (Middle) ± 300 cents W (Wide) $\pm 1,200$ cents Control Lever: -to 0 to +

REAR PANEL

EXTERNAL IN	Input Sensitivity: 0/-20 dB
TRIGGER	EG 1 IN, EG 2 IN (OFF +15 to +3V) (ON 0 to -10V) OUT (OFF +3V) (ON -7V)
CONTROL VOLT	VCO 1 IN, VCO IN (+125mV to +4V) OUT (+125mV to 4V)
OUTPUT	HIGH Output level (2 dBm) LOW Output level (-18 dBm)

FRONT PANEL

PHONES Jack

OTHERS

POWER SOURCE

.	USA and Canadian models 120V 60Hz
.	General models 110, 130, 220 or 240V selectable, 50/60Hz

POWER CONSUMPTION

.	.15 watts
-----------	-----------


DIMENSIONS 754 x 174 x 332.5 mm
(W x H x D) (29-5/8 x 6-7/8 x 13-1/8")

WEIGHT 10 kg (22 lbs.)


FINISH Semi-gloss black

* Specifications subject to change without notice.

REG Circuit Diagram, Circuit Board

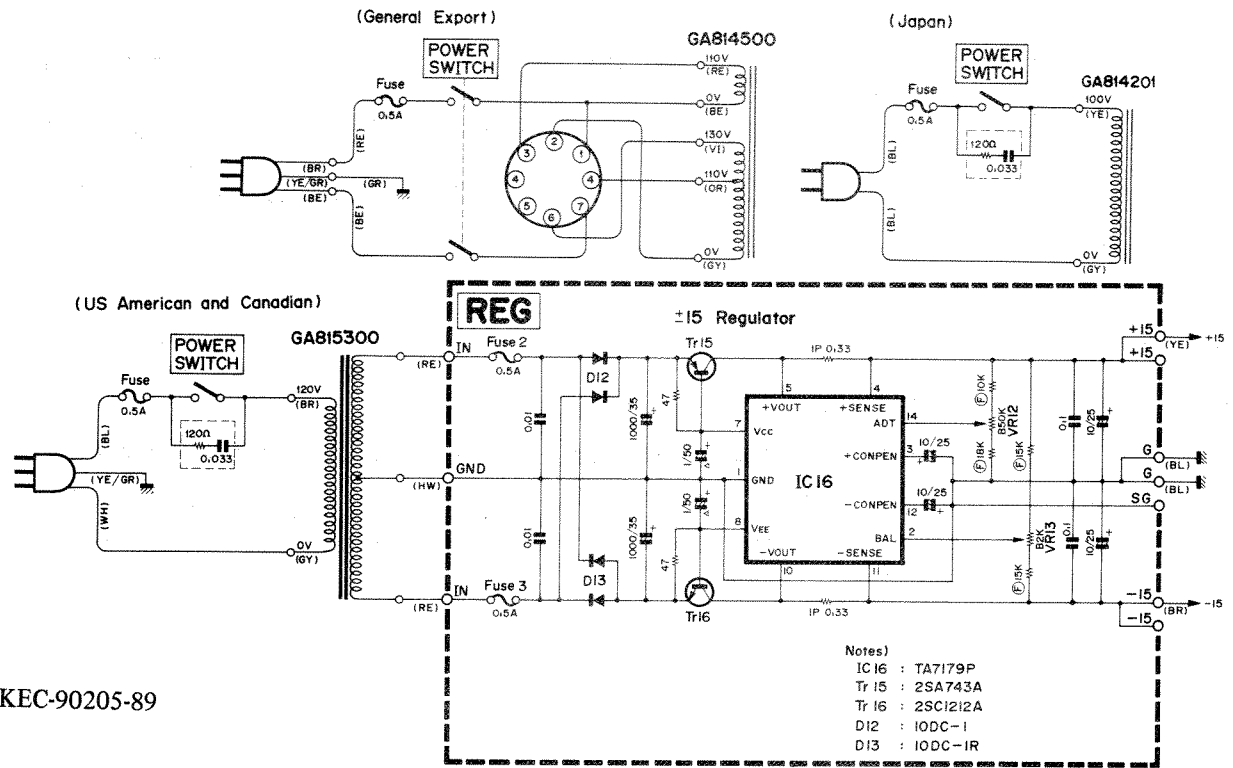


KEC-90205-89

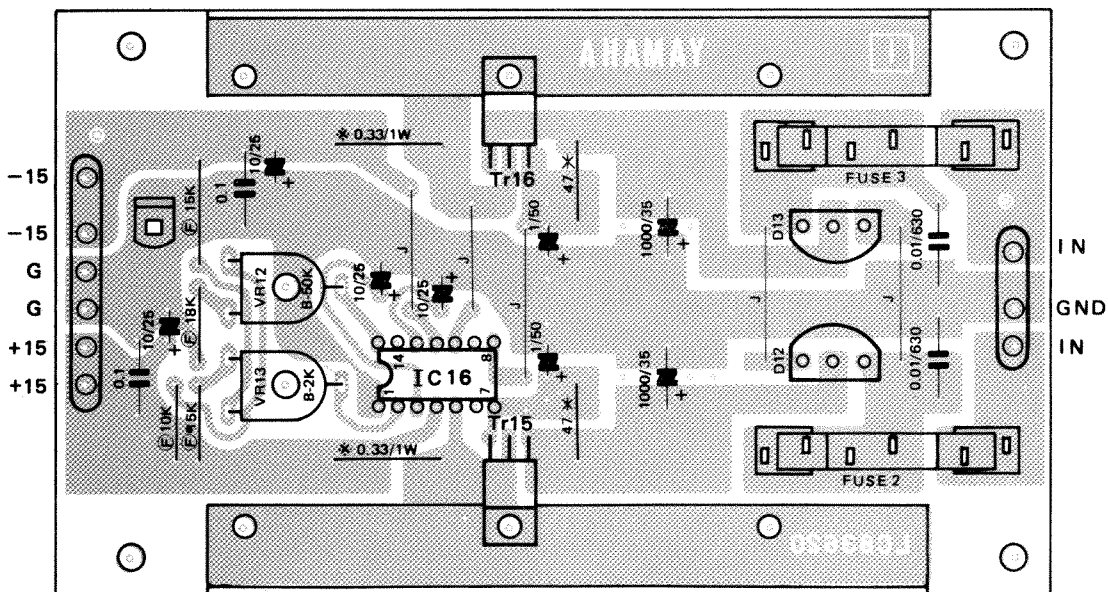

Note)

- | | |
|-----------------|--|
| 1. IC | 3. Diodes |
| IC16 : TA7179P | D12 : 10DC-1 |
| 2. Transistors | D13 : 10DC-1R |
| Tr15 : 2SA743A | 4. Resistors |
| Tr16 : 2SC1212A | Marked ⑤ : metal film |
| | Marked * : metal oxide (unflammable, 1W) |
| | Marked ✱ : carbon |

Key Switch Circuit Diagram

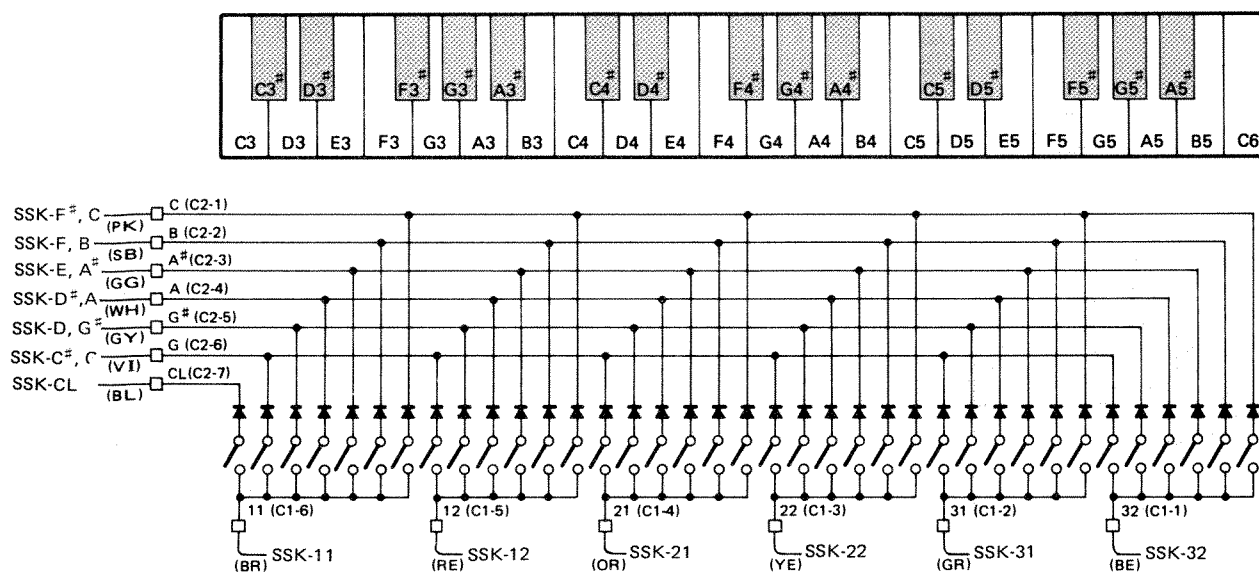

- Set the FUNCTION switch of the LFO block to S/H. The waveform given below should be at TP13.

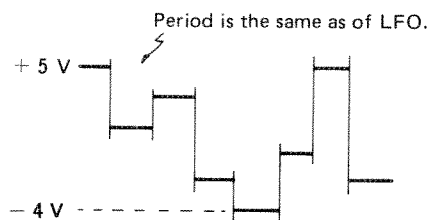


Fig. 5

4. Channel 1 VCO

- Adjust TUNE (PVR5) to read $0 \pm 0.1\text{V}$ at TP14.
- Set LFO MOD (PVR12) to 0, FEET selector (PSW10) to "2'", and the adjusting pot VR6 to the center position, and depress C6 key. Read $8,429 \pm 2\text{Hz}$ at TP22 by adjusting VR5 coarsely and VR6 finely. Then depressing C3 key, adjust VR4 to read $1,053 \pm 1\text{Hz}$. Repeat the steps until the specified frequency is read at TP22.
- Read the following values at each position of the FEET selector (PSW10) when key C6 key is depressed.

FEET	Frequency [Hz]
2'	8429
4'	4215
8'	2107
16'	1053.6
32'	526.8
64'	263.4

Tolerance 0.2%

- Next, set FEET (PSW10) to "8'", LFO SPEED (PVR3) to S, LFO FUNCTION (PSW4) to " $\sim$ ", and LFO MOD (PVR12) to "10". When C6 key is depress, reading should vary from $1,180 \pm 150\text{Hz}$ to $3,100 \pm 200\text{Hz}$ at TP22 at the speed determined by LFO SPEED (PVR3). The frequency range is determined by LFO MOD (PVR12).

● GLIDE

- e) Set LFO MOD (PVR12) at "0", VCO 1 DEPTH (PVR8) at "+", and TIME (PVR7) at L. Leave key C6 turned on. Then, reading should vary to $2,860 \pm 100\text{Hz}$ and, in 15 ± 3 seconds, back to $2,107 \pm 20\text{Hz}$ at TP22. The width of variation is determined by VCO1 DEPTH (PVR8) and the interval by TIME (PVR7).
- f) Similarly, when VCO1 DEPTH (PVR8) is set at "-", reading should vary to $1,350 \pm 100\text{Hz}$ and, in 15 ± 3 seconds, back to $2,107 \pm 20\text{Hz}$ at TP22.

● TUNE

- g) Set VCO1 DEPTH (PVR8) at "0", and TUNE (PVR5) at "+". When C6 key is turned on, read $2,205 \pm 20\text{Hz}$ at TP22 and $2,010 \pm 20\text{Hz}$ when TUNE is reset to "-".

5. WAVE SHAPE CONVERTER

- a) In the current setting, reset TUNE (PVR5) to "0", WAVE (PSW11) to " $\wedge$ ", VCO1 (PVR21) to "10", and EXT/NOISE (PVR20) to "0". Now see if the waveform given below is at TP23 when a key is turned on.

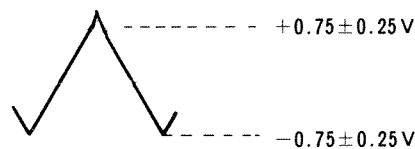


Fig. 6

- b) Detect the waveform given below when WAVE (PSW11) is set at " $\nearrow$ ".



Fig. 7

- c) Set PWM (PVR14) at "0", WAVE (PSW11) at " $\square$ ", and PW (PVR13) at "50%". Now detect the waveform given below.

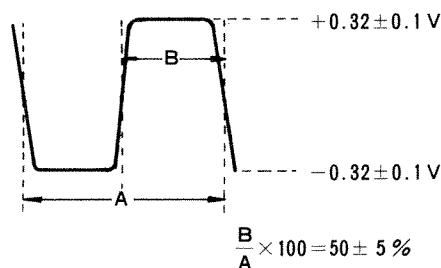


Fig. 8

- d) Set PSW (PVR14) at "10" and PW (PVR13) at "90%". Then adjust VR12 so that the signal rises to $95 \pm 3\%$ at point "a" in Fig. 9-A. Detect the waveform given in (B) when PWM (PVR14) is set at "0".

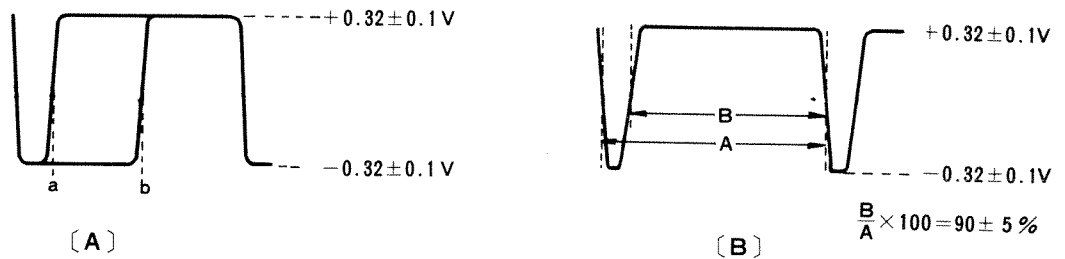


Fig. 9

6. DETUNE Circuit

- Connect a dummy plug to terminal CONTROL VOLT VCO2 IN on the rear panel. Adjust VR10 to read $0 \pm 50 \mu\text{V}$ at TP17 (KV4).
- Set VCO2 DETUNE (PVR6) at "0" position. Turning on key C6, adjust VR11 to read $2 \pm 0.001\text{V}$ at TP17 (KV4). Next, read $1.29 \pm 0.1\text{V}$ at TP17 (KV4) when VCO2 DETUNE (PVR6) is set at "-" and $3.30 \pm 0.2/-0.4\text{V}$ when it is set at "+".

7. Channel II

- Turning on C6 key, adjust VCO2 DETUNE (PVR6) to read $2 \pm 0.001\text{V}$ at TP17 (KV4).
- Then carry out the same adjustment as for channel I.

● CPB CIRCUIT BOARD

CHANNEL 1

1. VCF

Adjust CUTOFF FREQ (PVR24) to read $5 \pm 0.1\text{V}$ at TP8.

Adjust RESONANCE (PVR25) to read $5 \pm 0.1\text{V}$ at TP9.

Adjust BRILLIANCE (PVR58) to read $0 \pm 10\text{mV}$ at TP7.

VCF block	LFO MOD	Set to 0
	EG DEPTH	0
	HPF/BPF/LPF	LPF
VC block	FEET	2'
	WAVE	^
MIXER block	VCO 1	10

In the above setting, turn on C3 key and adjust MIXER so as to apply $1.0 \pm 0.05\text{V}_{\text{p-p}}$ to terminal IN (TP4). And compare the waveform given below to TP10 by adjusting the peak with VR1 and the peak level to $1.0 \pm 0.05\text{V}_{\text{p-p}}$ with VR2.





Fig. 10

2. VCA

Add the following conditions to the above setting.

VCF block	EG1+/EG1-/EG2+	EG1+
EG block	EXT/KBD	KBD
	NORMAL/TIME×5	NOMAL
	ATTACK TIME	S
	DECAY TIME	S
	SUSTAIN LEVEL	10
	RELEASE TIME	S
VCA block	INITIAL LEVEL	0
	LFO MOP	D
	EG DEPTH	10
	EG1/EG2	EG 1

Turning on key C3, adjust VR4 to read $1.0 \pm 0.05\text{V}_{\text{p-p}}$ at TP11. Change the setting as given below.

LFO block	SPEED	F
	FUNCTION	~
VCA block	INITIAL LEVEL	10
	LFO MOD	10
MIXER block	EXT/NOISE	0
	VCO 1	0

Adjust VR3 to minimize the waveform at TP11.

3. Envelope Generator (EG-1)

	a	b
EXT/KBD(PSW44)	KBD	KBD
NOMMAL/TIME×5 (PSW35)	NORMAL	NORMAL
ATTACK TIME(PVR46)	L	S
DECAY TIME(PVR47)	L	S
SUSTAIN LEVEL(PVR48)	0	10
RELEASE TIME (PVR49)	0	L

a) Turn on a key in the above setting, compare the waveforms given below to TP22 and TP23.

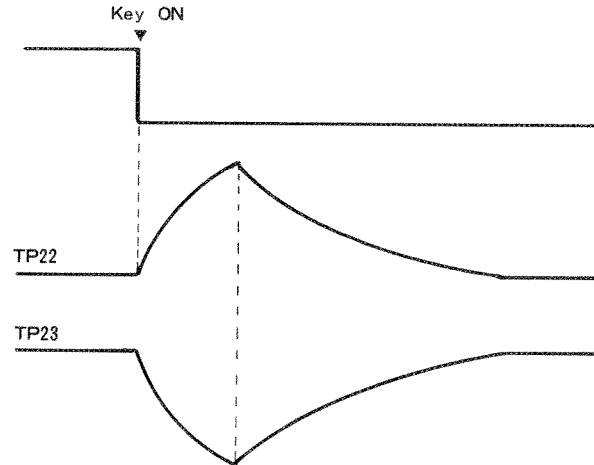


Fig. 11

b) Compare the waveform given below to TP22 when a key is turned on and off in the same conditions.


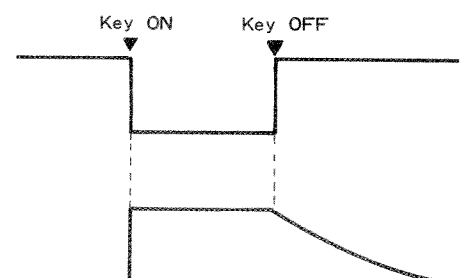


Fig. 12

PARTS LIST Exploded View

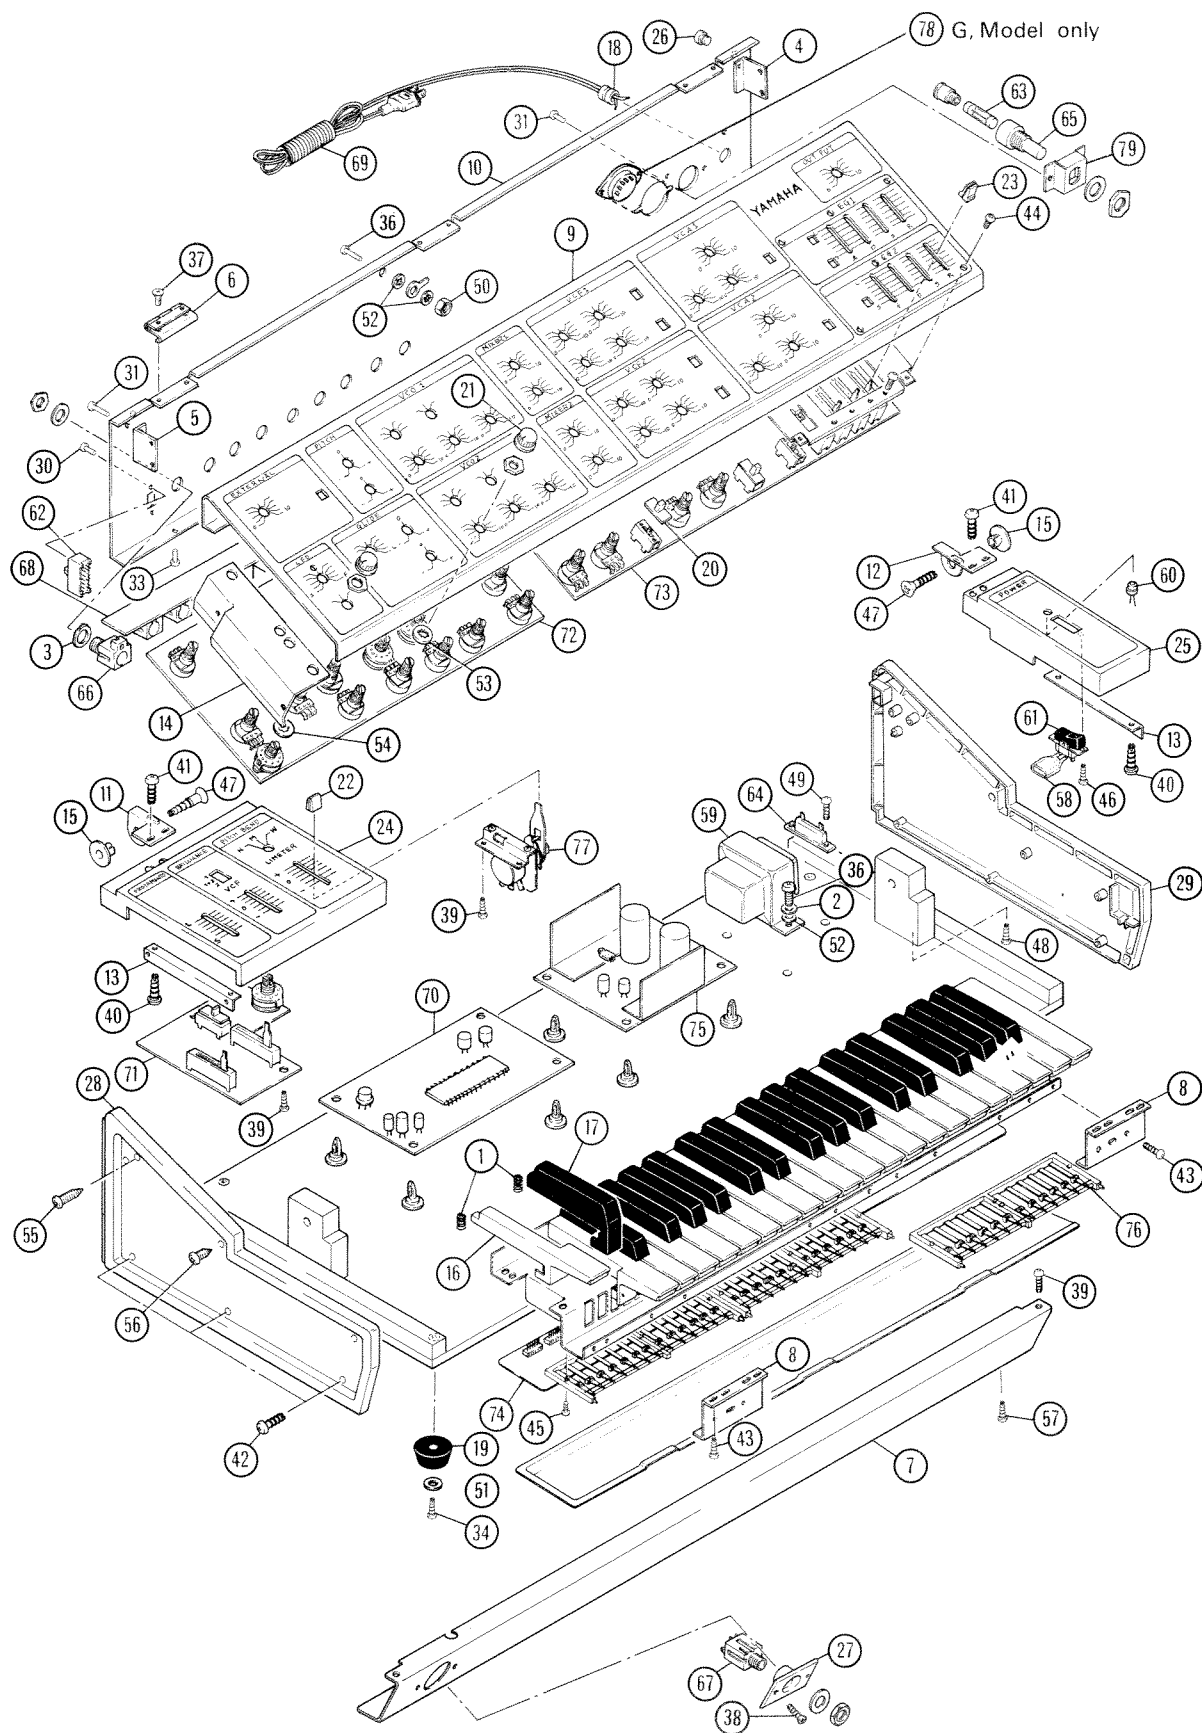

Mechanical Parts

J Japan U U.S.A C Canadian G General (Except J-U-C)

Ref. No.	Part No.	Description (部 品 名)	Remarks	Common Model		
1	30 10 00 AA 04 37 20	Coil Spring	コイルスプリング			
2	30 54 00 AA 80 44 90	Flat Washer	平 座 金			
3	30 10 00 AA 80 58 20	Spacer	ス ペ ー サ ー			
4	30 10 00 AA 80 59 90	Angle	ア ン グ ル			
※ 5	30 10 00 AA 80 72 10	"	"			
6	30 10 00 AA 80 72 60	Hinge	蝶 番			
※ 7	30 10 00 AA 80 85 60	Front rail	口 板			
※ 8	30 10 00 AA 80 85 90	Front rail Spacer	口 金			
※ 9	30 10 00 AA 80 86 10	Control Panel	コントロールパネル			
※ 10	30 10 00 AA 80 86 20	Rear Panel	リ ア パ ネ ル	J		
	30 10 00 AA 80 86 30	"	"	U, C		
	30 10 00 AA 80 98 20	"	"	G		
11	30 10 00 AA 80 87 10	End Block Angle (L)	回 転 金 具 (左)			
12	30 10 00 AA 80 87 20	" (R)	" (右)			
13	30 10 00 AA 80 87 40	End Block Holder	拍 子 木 金 具			
※ 14	30 10 00 AA 80 90 20	Panel Holder	パ ネ ル 取 付 金 具			
15	30 10 00 CB 01 18 30	Bushing	ブ ッ シ ュ			
16	30 10 00 CB 03 22 10	White Key C, F	白 鍵			
	30 10 00 CB 03 22 20	" D	"			
	30 10 00 CB 03 22 30	" B, E	"			
	30 10 00 CB 03 22 40	" G	"			
	30 10 00 CB 03 22 50	" A	"			
	30 10 00 CB 03 22 60	" C'	"			
17	30 10 00 CB 03 22 70	Black Key	黒 鍵			
18	30 10 00 CB 07 27 50	Cord Bushing	コ ー ド ブ ッ シ ュ	J		
	30 10 00 CB 81 12 30	"	"	U, C		
	30 10 00 CB 03 28 40	"	"	G		
19	30 10 00 CB 80 12 70	Leg	ゴ ム 脚			
20	30 10 00 CB 80 52 30	Knob	ツ マ ミ			
21	30 10 00 CB 81 01 30	"	"			
22	30 10 00 CB 81 12 80	"	"			
23	30 10 00 CB 81 12 90	"	"			
※ 24	30 10 00 CB 81 26 80	End Block (Left)	拍 子 木 (左)			
※ 25	30 10 00 CB 81 26 90	" (Right)	" (右)			
※ 26	30 10 00 CB 81 28 20	Stopper Rubber	ス ト ッ パ ー ゴ ム			
※ 27	30 10 00 CB 81 28 40	Phone Panel	フ ォ ー ン パ ネ ル			
※ 28	30 10 00 CB 81 29 30	Side Board (Left)	側 板 (左)			
※ 29	30 10 00 CB 81 29 40	" (Right)	" (右)			
30	40 10 00 EA 32 60 40	Pan Head Screw M2.6 x 4 ZMC2-BI	ナ ベ 小 ネ ジ			
31	40 10 00 EA 33 00 60	" M3 x 6	"			
33	40 10 00 EA 33 01 00	" M3 x 10 "	"			
34	40 10 00 EA 33 01 40	" M3 x 14 "	"			
36	40 10 00 EA 34 01 00	" M4 x 10 "	"			
37	40 10 00 EB 03 00 50	Flat Head Screw M3 x 5 ZMC2-Y	サ ラ 小 ネ ジ			
38	40 10 00 EF 33 00 80	Oval Head Screw M3 x 8 ZMC2-BI	丸 皿 小 ネ ジ			
39	40 10 00 Ei 03 00 80	Self Tapping Screw 3 x 8 ZMC2-Y	バ イ ン ド タ ッ ピ ン グ ネ ジ			
40	40 10 00 Ei 04 00 80	" 4 x 8 "	"			
41	40 10 00 Ei 04 01 00	" 4 x 10 "	"			
42	40 10 00 Ei 34 02 50	" 4 x 25 ZMC2-BI	"			
43	40 10 00 EJ 04 00 80	Pan Head Tapping Screw 4 x 8 ZMC2-Y	ナ ベ タ ッ ピ ン グ ネ ジ			
44	40 10 00 EL 33 00 50	Truss Head Screw M3 x 6 ZMC2-BI	ト ラ ス 小 ネ ジ			
45	40 10 00 EO 02 00 80	Flat Head Tapping Screw 2 x 8 ZMC2-Y	サ ラ タ ッ ピ ン グ ネ ジ			
46	40 10 00 EO 03 00 80	" 3 x 8 "	"			

※ New Parts

Ref. No.	Part No.				Description (部 品 名)		Remarks	Common Model		
47	40	10	00	EP 04 12 50	Flat Head Wood Screw 4.1 x 25	ZMC2-Y	サ ラ 木 ネ ジ			
48	40	10	00	EP 33 52 50	"	3.5 x 25 ZMC2-BI	"			
49	40	10	00	EQ 03 11 00	Round Head Wood Screw 3.1 x 10	ZMC2-Y	丸 木 ネ ジ			
50	40	10	00	EV 10 00 40	Hexagonal Nut	4 φ "	六 角 ナ ッ ト			
51	40	10	00	EV 20 30 40	Flat Washer	4 φ ZMC2-BI	平 座 金			
52	40	10	00	EV 43 00 40	Toothed Lock Washer	4 φ ZMC2-Y	歯 付 座 金			
53	40	10	00	EV 43 00 70	"	7 φ "	"			
54	40	10	00	EV 43 00 90	"	9 φ "	"			
55	40	10	00	EZ 98 06 00	Binding Screw	M4 x 18 ZMC2-BI	尖先 バインド 小ネジ			
56	40	10	00	EZ 98 06 10	"	M4 x 10 "	"			
57	40	10	00	EZ 98 06 20	"	M5 x 20 "	"			
58	40	10	00	FZ 00 01 10	Spark Killer		ス パ ー ク キ ラ ー	J, U		
	40	10	00	FZ 00 09 50	"		"	C		
※	59	30	10	00	NB 81 12 80	Power Transformer Unit	電源トランスユニット	J		
		30	10	00	NB 81 28 10	"	"	U, C		
		30	10	00	NB 81 28 20	"	"	G		
		40	10	00	GA 81 42 10	Power Transformer	電 源 ト ラ ンス	J		
		40	10	00	GA 81 53 00	"	"	U, C		
		40	10	00	GA 81 45 00	"	"	G		
		40	10	00	LB 60 17 90	Connector 3P	コ ネ ク タ ー			
		40	10	00	LB 60 13 90	Connector Terminal	コネクタターミナル			
		40	10	00	LB 60 15 50	Connector	コ ネ ク タ ー	G		
		40	10	00	LB 60 16 70	Pin Contact	ピン コ ン タ ク ト	G		
60	40	10	00	IF 00 13 10	L E D	TLR-102KB	L E D			
61	40	10	00	KA 10 09 30	Power Switch	SJ1923	パ ワ ー ス イ ッ チ	J		
※		40	10	00	KA 10 09 80	"	"	U, C		
※		40	10	00	KA 10 09 90	"	"	G		
62	40	10	00	KA 40 02 50	Slide Switch		ス ラ イ ド ス イ ッ チ			
63	40	10	00	KB 00 03 10	Fuse 250V 0.5A		ヒ ュ ー ズ	J, U, C		
	40	10	00	KB 00 07 10	" 500mA		"	G		
※	64	40	10	00	LA 00 29 50	2P Terminal	2 P 端 子 板	J, U, C		
		40	10	00	LA 00 10 00	3P "	3 P "	G		
65	40	10	00	LB 20 04 90	Fuse Holder SN2052		ヒ ュ ー ズ ホ ル ダ ー	J, U, C		
	40	10	00	LB 20 05 90	"		"	G		
66	40	10	00	LB 20 08 60	Jack		ジ ャ ッ ク			
67	40	10	00	LB 40 01 00	"		"			
※	68	40	10	00	LC 83 70 00	JK P. C Board	JKシートプリント基板			
69	40	10	00	MG 00 04 10	AC Cord Assembly		電 源 コ ー ド	J		
	40	10	00	MG 00 02 70	"		"	U, C		
	40	10	00	MG 00 04 50	"		"	G		
※	70	30	12	45	NA 80 43 20	SSK Circuit Board ⇨ P. 26 ~ 27	S S K シ ー ト			
※	71	30	12	00	NA 80 43 30	PN1 Circuit Board	P N 1 シ ー ト			
※	72	30	12	45	NA 80 43 40	CPA Circuit Board	C P A シ ー ト			
※	73	30	12	45	NA 80 43 50	CPB Circuit Board	C P B シ ー ト			
74	30	10	00	NA 80 43 90	MK Circuit Board		M K シ ー ト			
75	30	12	00	NA 80 44 30	REG Circuit Board		R E G シ ー ト	J		
76	30	10	00	NB 05 51 50	Switch Assembly 13 Key		ス イ ッ チ Ass'y			
	30	10	00	NB 81 12 90	" 12 Key		"			
※	77	30	12	00	NB 81 12 90	Pitch Bend Assembly	ピッチベンド Ass'y			
78	40	10	00	LB 20 02 50	Voltage Selector		電 圧 切 替 器	G		
	40	10	00	AA 80 64 40	Fuse Holder Bracket		平 座 金			

* New Parts

Circuit Boards and Electrical Parts

Ref. No.	Part No.	Description (部 品 名)	Remarks	Common Model
※	30 12 45 NA 80 43 20	SSK Circuit Board	S S K シ ー ト	
※	40 10 00 HU 59 51 00	Metal Film Resistor 100Ω 0.1%	金 皮 抵 抗	
※	40 10 00 HU 59 61 00	" 1KΩ "	"	
※	40 10 00 HU 59 62 00	" 2KΩ "	"	
※	40 10 00 HZ 00 11 40	" 29.94KΩ "	"	
※	40 10 00 HZ 00 11 50	" 1.684KΩ "	"	
	40 10 00 HT 19 00 50	Variable Resistor B10KΩ	半 固 定 ボ リ ュ ー ム	
	40 10 00 iA 10 15 70	Transistor 2SA1015	ト ラ ン ジ ス タ	
	40 10 00 iA 18 15 10	" 2SC1815	"	
	40 10 00 iG 00 17 20	I C TC4069	I C	
	40 10 00 iG 02 55 00	" TA7504	"	
	40 10 00 iG 02 56 00	" TA7505	"	
	40 10 00 iG 02 84 00	" NJM4558	"	
	30 10 00 YM 24 80 00	" YM24800	"	
	40 10 00 LB 40 05 70	Connector 4P	コ ネ ク タ ー	
	40 10 00 LB 60 24 60	" 7P	"	
	40 10 00 LB 60 24 70	" 10P	"	
	40 10 00 LB 60 29 40	" 6P	"	
※	32 12 00 NA 80 43 30	PN1 Circuit Board	P N 1 シ ー ト	
※	40 10 00 HU 59 45 00	Metal Film Resistor 50Ω 0.1%	金 皮 抵 抗	
※	40 10 00 HU 59 55 00	" 500Ω "	"	
※	40 10 00 HU 59 65 50	" 5.5KΩ "	"	
※	40 10 00 HZ 00 10 70	" 66.7Ω "	"	
※	40 10 00 HZ 00 10 80	" 109.1Ω "	"	
※	40 10 00 HZ 00 10 90	" 122.5Ω "	"	
※	40 10 00 HZ 00 11 00	" 340.9Ω "	"	
※	40 10 00 HZ 00 11 20	" 810.8Ω "	"	
	40 10 00 HQ 42 00 30	Slide Variable Resistor B10KΩ	ス ラ イ ド ボ リ ュ ー ム	
	40 10 00 HQ 42 00 40	" A2MΩ	"	
※	40 10 00 KA 40 03 60	Slide SW	ス ラ イ ド S W (2 回 路 3 接 点)	
※	40 10 00 KA 50 14 30	Rotary SW	ロ ー タ リ ー S W (4 回 路 3 接 点)	
	40 10 00 LB 40 06 30	Connector 4P	コ ネ ク タ ー	
	40 10 00 LB 60 30 00	" 7P	"	
	40 10 00 LB 60 30 10	" 8P	"	
※	30 12 45 NA 80 43 40	CPA Circuit Board	C P A シ ー ト	
	40 10 00 FM 09 71 00	BP Capacitor 10μF/16V	B P コ ン	
	40 10 00 FM 22 61 00	" 1μF/25V	"	
	40 10 00 FP 34 61 50	Tantalum Capacitor 1.5μF/25V	タ ン タ ル コ ン	
	40 10 00 FP 35 56 80	" 0.68μF/35V	"	
※	40 10 00 HU 59 65 00	Metal Film Resistor 5KΩ 0.1%	金 皮 抵 抗	
※	40 10 00 HU 59 71 00	" 10KΩ "	"	
※	40 10 00 HU 59 72 00	" 20KΩ "	"	
※	40 10 00 HU 59 74 00	" 40KΩ "	"	
※	40 10 00 HU 59 78 00	" 80KΩ "	"	
	40 10 00 HU 57 58 20	" 820Ω 1%	"	
	40 10 00 HU 57 61 60	" 1.6KΩ "	"	
	40 10 00 HU 57 65 10	" 5.1KΩ "	"	
	40 10 00 HU 57 68 20	" 8.2KΩ "	"	
	40 10 00 HU 57 71 00	" 10KΩ "	"	

※ New Parts


Ref. No.	Part No.	Description (部 品 名)	Remarks	Common Model		
	40 10 00 HU 57 71 10	Metal Film Resistor 11K Ω 1%	金 皮 抵 抗			
	40 10 00 HU 57 71 80	" 18K Ω "	"			
	40 10 00 HU 57 72 00	" 20K Ω "	"			
	40 10 00 HU 57 78 20	" 82K Ω "	"			
	40 10 00 HU 57 81 00	" 100K Ω "	"			
	40 10 00 HU 57 82 00	" 200K Ω "	"			
	40 10 00 HU 57 82 70	" 270K Ω "	"			
	40 10 00 iA 10 15 70	Transistor 2SA1015	ト ラ ン ジ ス タ			
	40 10 00 iE 00 00 10	F E T 2SK30A	F E T			
	40 10 00 iE 10 12 10	" 2SK105	"			
	40 10 00 iF 00 00 40	Diode 1S1555	ダ イ オ ー ド			
	40 10 00 iF 00 03 00	" 1S1715P	"			
	40 10 00 iG 00 15 00	I C #00150	I C			
	40 10 00 iG 00 15 30	" #00153	"			
	40 10 00 iG 02 55 00	" TA7504S	"			
	40 10 00 iG 02 84 00	" NJM4558	"			
	40 10 00 HS 31 05 50	Variable Resistor A10K Ω	ボ リ ュ ー ム			
	40 10 00 HS 31 05 70	" B10K Ω	"			
	40 10 00 HS 31 06 00	" A2M Ω	"			
※	40 10 00 HS 31 07 30	" B10K Ω	(センタークリック付)			
	40 10 00 HT 19 00 40	" B5K Ω	半固定ボリューム			
	40 10 00 HT 19 00 50	" B10K Ω	"			
	40 10 00 HT 19 00 70	" B50K Ω	"			
	40 10 00 HT 19 00 80	" B100K Ω	"			
	40 10 00 HT 19 01 00	" B500K Ω	"			
	40 10 00 HT 19 01 30	" B2K Ω	"			
	40 10 00 HT 19 01 40	" B200 Ω	"			
	40 10 00 KA 40 06 00	Slide SW	ス ラ イ ド S W (2 回 路 2 接 点)			
	40 10 00 KA 50 10 80	Rotary SW	ロ ー タ リ ー S W (2 回 路 6 接 点)			
※	40 10 00 KA 50 14 30	" "	(4 回 路 3 接 点)			
	40 10 00 LB 30 09 60	Connector 3P	コ ネ ク タ ー			
	40 10 00 LB 60 29 90	" 6P	"			
	40 10 00 LB 60 30 10	" 8P	"			
※	30 12 45 NA 80 43 50	CPB Circuit Board	C P B シ ー ト			
※	30 10 00 AA 80 86 50	EG Sub Panel	E G サ ブ パ ネ ル			
	40 10 00 FM 09 71 00	BP Capacitor 10 μ F/16V	B P コ ン			
	40 10 00 FM 11 61 00	" 1 μ F/50V	"			
	40 10 00 FP 33 64 70	Tantalum Capacitor 4.7 μ F/16V	タ ン タ ル コ ン			
	40 10 00 FP 34 61 00	" 1 μ F/25V	"			
	40 10 00 HL 31 24 70	Metal Film Resistor 0.47 Ω 1P	金 皮 抵 抗			
	40 10 00 HL 32 36 80	" 6.8 Ω 2P	"			
	40 10 00 HL 32 51 50	" 150 Ω 2P	"			
	40 10 00 HQ 42 00 30	Slide Variable Resistor 810K Ω	スライドボリューム			
	40 10 00 HQ 42 00 40	" A2M Ω	"			
	40 10 00 HS 31 05 50	Variable Resistor A10K Ω	ボ リ ュ ー ム			
	40 10 00 HS 31 05 70	" B10K Ω	"			
	40 10 00 HT 19 00 70	" B50K Ω	半固定ボリューム			
	40 10 00 HT 19 00 80	" B100K Ω	"			
	40 10 00 HT 19 00 90	" B200K Ω	"			
	40 10 00 iA 05 09 10	Transistor 2SA509	ト ラ ン ジ ス タ			
	40 10 00 iA 10 15 20	" 2SA1015	"			

※ New Parts


Ref. No.	Part No.	Description (部 品 名)	Remarks	Common Model		
	40 10 00 iC 05 09 20	Transistor 2SC509	ト ラ ン ジ ス タ			
	40 10 00 iC 18 15 10	" 2SC1815	"			
	40 10 00 iF 00 00 10	F E T 2SK30A	F E T			
	40 10 00 iF 00 00 40	Diode 1S1555	ダ イ オ ー ド			
	40 10 00 iG 00 15 10	I C iG00151	I C			
	40 10 00 iG 00 15 60	" iG00156	"			
	40 10 00 iG 02 84 00	" NJM4558	"			
	40 10 00 KA 40 05 90	Slide Switch	ス ラ イ ド ス イ ッ チ			
	40 10 00 KA 40 06 00	"	"			
	40 10 00 LB 30 09 60	Connector 3P	コ ネ ク タ ー			
	40 10 00 LB 50 03 70	" 5P	"			
	40 10 00 LB 60 30 10	" 8P	"			
	40 10 00 LC 83 70 10	JK P. C Board	JK シ ー ト プ リ ン ト 基 板			
	40 10 00 LB 20 08 60	Jack	ジ ャ ッ ク			
	30 12 00 NA 80 44 30	REG Circuit Board #83622	R E G シ ー ト	J		
	30 12 00 NA 80 52 30	"	"	U, C		
	30 12 00 NA 80 52 40	"	"	G		
	30 10 00 BA 80 34 90	Radiator	放 熱 板			
	40 10 00 HL 31 23 30	Metal Oxide Film Resistor 0.33Ω 1P	酸 金 抵 抗			
	40 10 00 HT 19 00 70	Variable Resistor B50KΩ	半 固 定 ボ リ ュ ム			
	40 10 00 HT 19 01 30	" B2KΩ	"			
	40 10 00 HU 57 71 10	Metal Film Resistor 10KΩ 1%	金 皮 抵 抗			
	40 10 00 HU 57 71 50	" 15KΩ "	"			
	40 10 00 HU 57 71 80	" 18KΩ "	"			
	40 10 00 iA 07 43 90	Transistor 2SA743	ト ラ ン ジ ス タ			
	40 10 00 iC 12 12 90	" 2SC1212	"			
	40 10 00 iG 03 20 10	I C TA7179	I C			
	40 10 00 iH 00 01 40	Diode 10DC-4	ダ イ オ ー ド			
	40 10 00 iH 00 01 50	" 10DC-4R	"			
	40 10 00 KB 00 02 00	Fuse 125V, 0.5A	ヒ ュ ー ズ	J		
	40 10 00 KB 00 11 50	" 250V 0.5A	"	U, C		
	40 10 00 KB 00 07 10	" 250V 500mAT	"	G		
	40 10 00 LB 20 05 70	Fuse Holder	ヒ ュ ー ズ ホ ル ダ ー ビ ン			
	40 10 00 LB 60 13 80	Connector 6P	コ ネ ク タ ー			
	40 10 00 LB 60 18 00	" 3P	"			
	30 10 00 NA 80 43 90	MK Circuit Board #83710	M K シ ー ト			
	40 10 00 iF 00 00 40	Diode 1N1555	ダ イ オ ー ド			
	40 10 00 LB 60 24 60	Connector Base Pin 7P	ト ッ プ 型 ベ ー ス ポ ス ト			
	40 10 00 LB 60 29 40	" 6P	"			
	40 10 00 BB 00 44 30	Connector Contact	コ ン タ ク ト			
	40 10 00 LB 30 07 20	Connector Housing 3P	ハ ウ ジ ン グ			
	40 10 00 LB 40 05 60	" 4P	"			
	40 10 00 LB 50 02 40	" 5P	"			
	40 10 00 LB 60 13 90	Connector Terminal	コ ネ ク タ ー タ ー ミ ナ ル			
	40 10 00 LB 60 14 00	Connector Housing 6P	コ ネ ク タ ー ハ ウ ジ ン グ			
	40 10 00 LB 60 17 90	" 3P	"			
	40 10 00 LB 60 24 40	" 7P	"			

※ New Parts


[illegible]

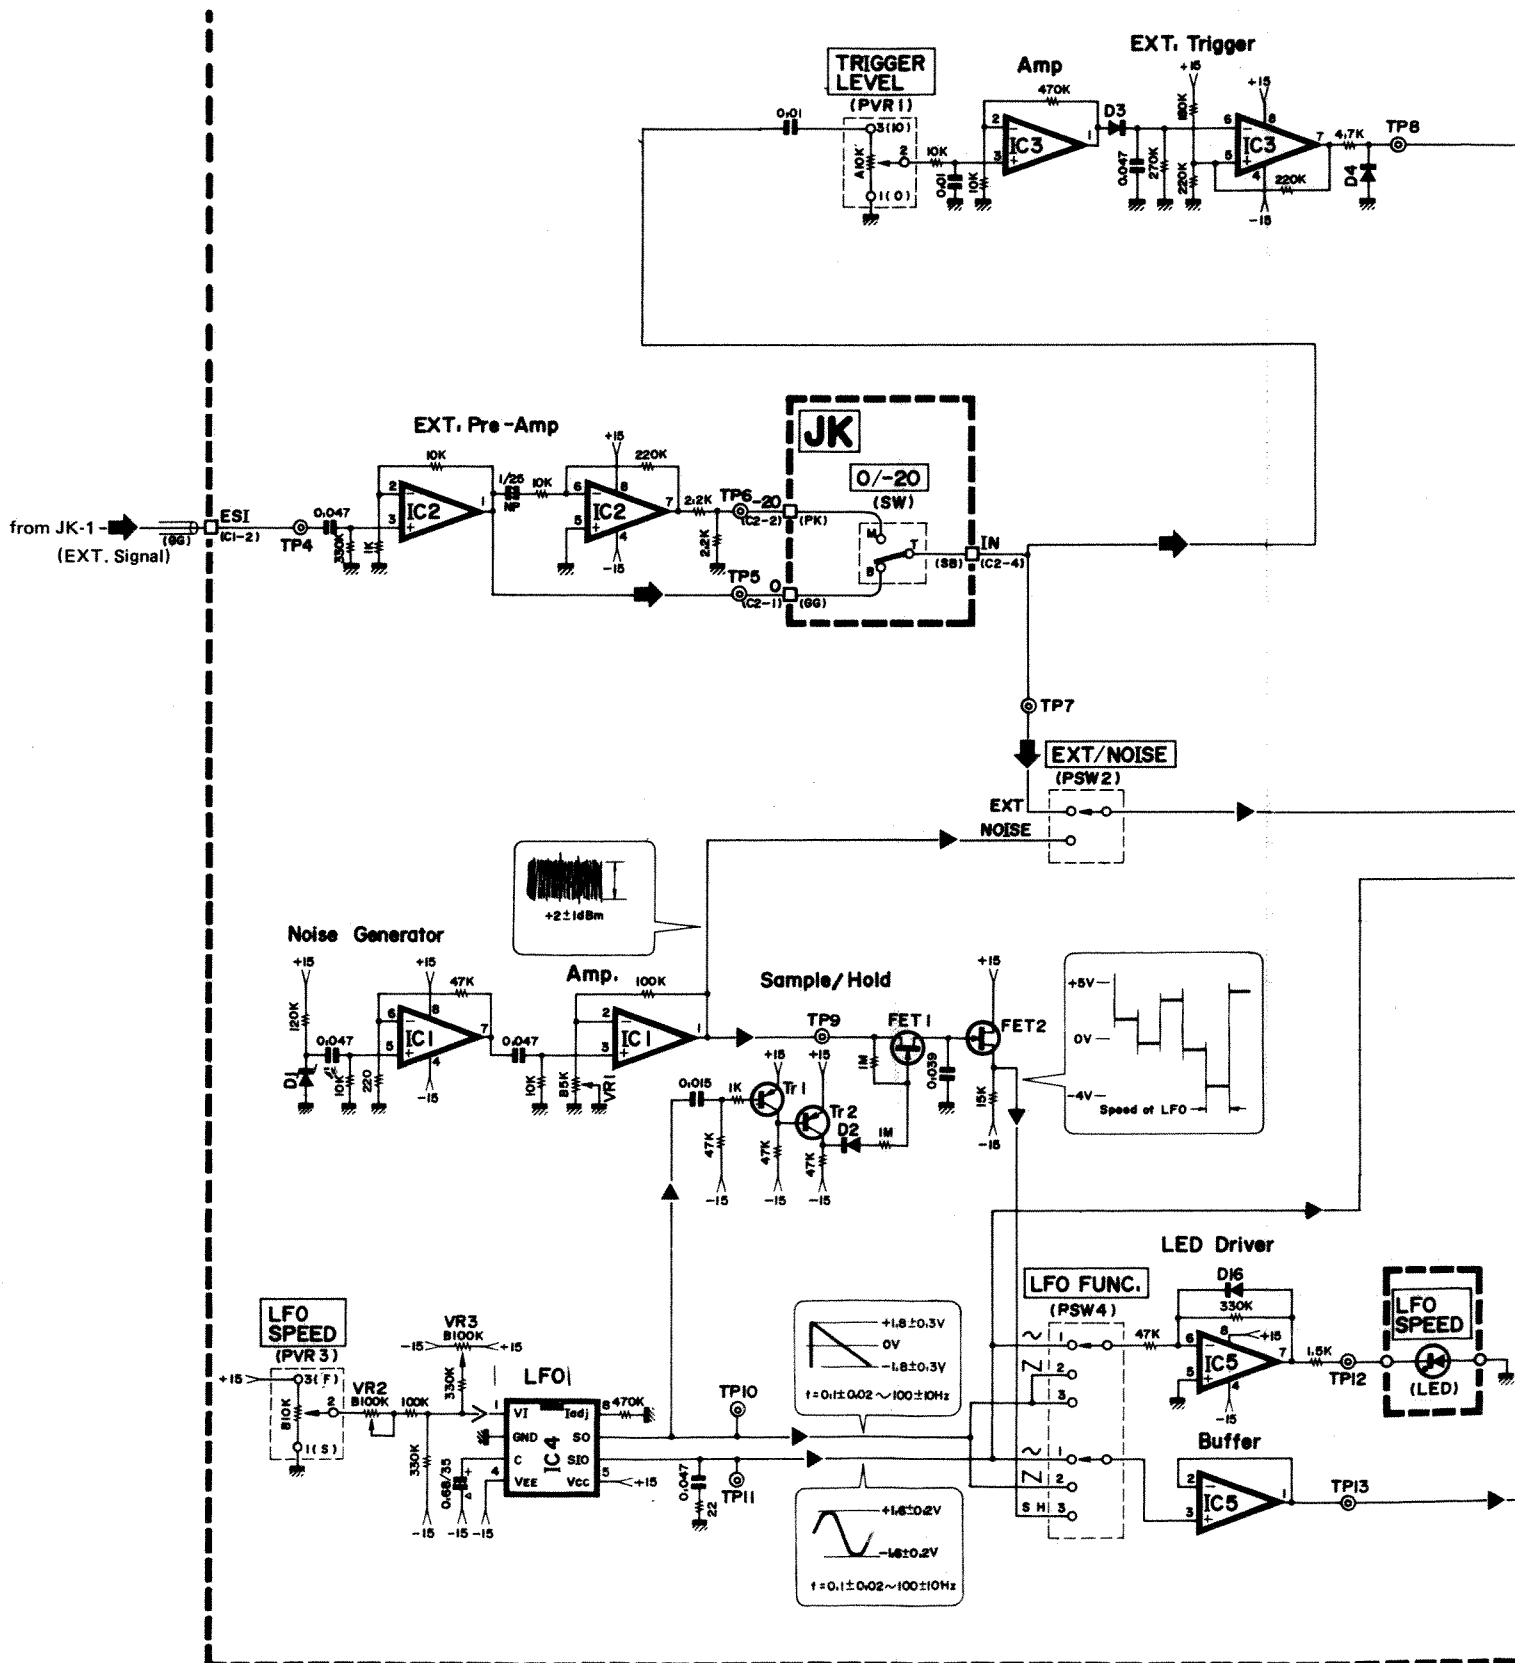

CPA Circuit Board

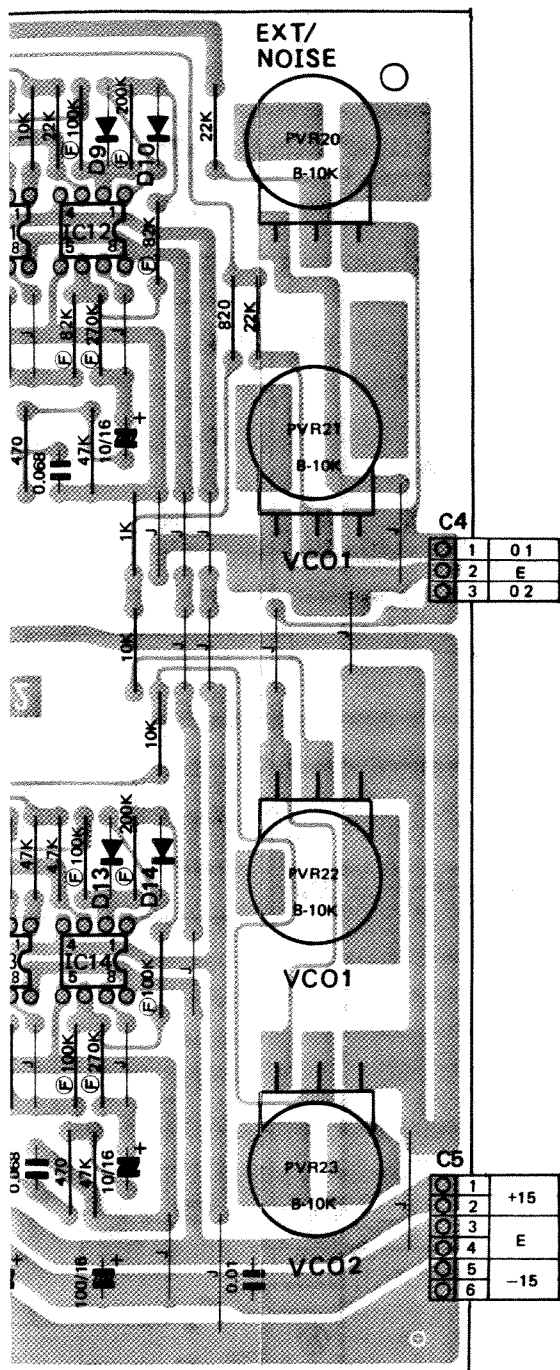


● VCO • IC (IG00153)

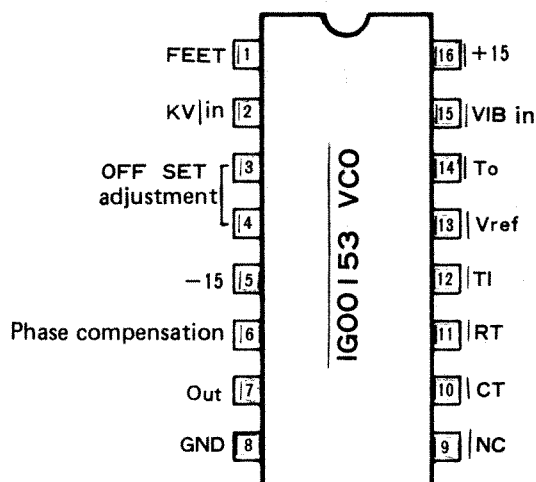


1. FTFEET Change
2. KVKEY VOLT input terminal
3. 4. OFF SET. . .VR4 connects to 3 and 4 which adjusts midpoint frequency (lower key's note) so that VCOIII I's output frequency correspond to KEY voltage.
5. VEE-15V input terminal
6. ComTerminal for phase compensation
7. OutVCO output terminal ()
8. GNDGround terminal
9. NCUnused
10. CTC and R which determine frequency (highest key note) connect.
11. RTMonostable multivibrator threshold voltage input terminal
12. TITime interval input terminal
13. Vref.Resistor which supplies regulated current connects
14. ToIntegration capacitor connects
15. VIBVib in
16. Vcc+15V input terminal


● VCF • IC (IG00156)

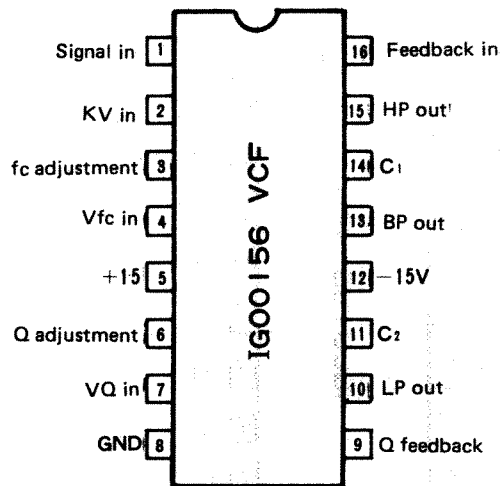


1. AI. Audio signal in
Signal comes from VCO and WSC.
2. KV. Key voltage in
Key voltage comes in to scan keyboard.
3. fc. Cutoff frequency adjustment
Sets cutoff control current.
4. Vf. Cutoff voltage in
Cutoff control voltage comes in to vary tone.
Cutoff center is also adjusted.
5. Vcc. +15V input terminal
6. Qo. Q adjustment
7. VQ. Q control voltage in
Control voltage comes in to vary Q.
8. GND. Ground
9. FB. Q feedback
10. LP. Low-pass filter output




11. C2. Connects to capacitor determining cutoff frequency.
12. Vcc. -15V input terminal
13. BP. Band-pass filter output



14. C1. Connects to capacitor determining cutoff frequency.
15. HP. High-pass filter output





16. IN. Feedback in
Feedback signal comes in which determines cut-off frequency.

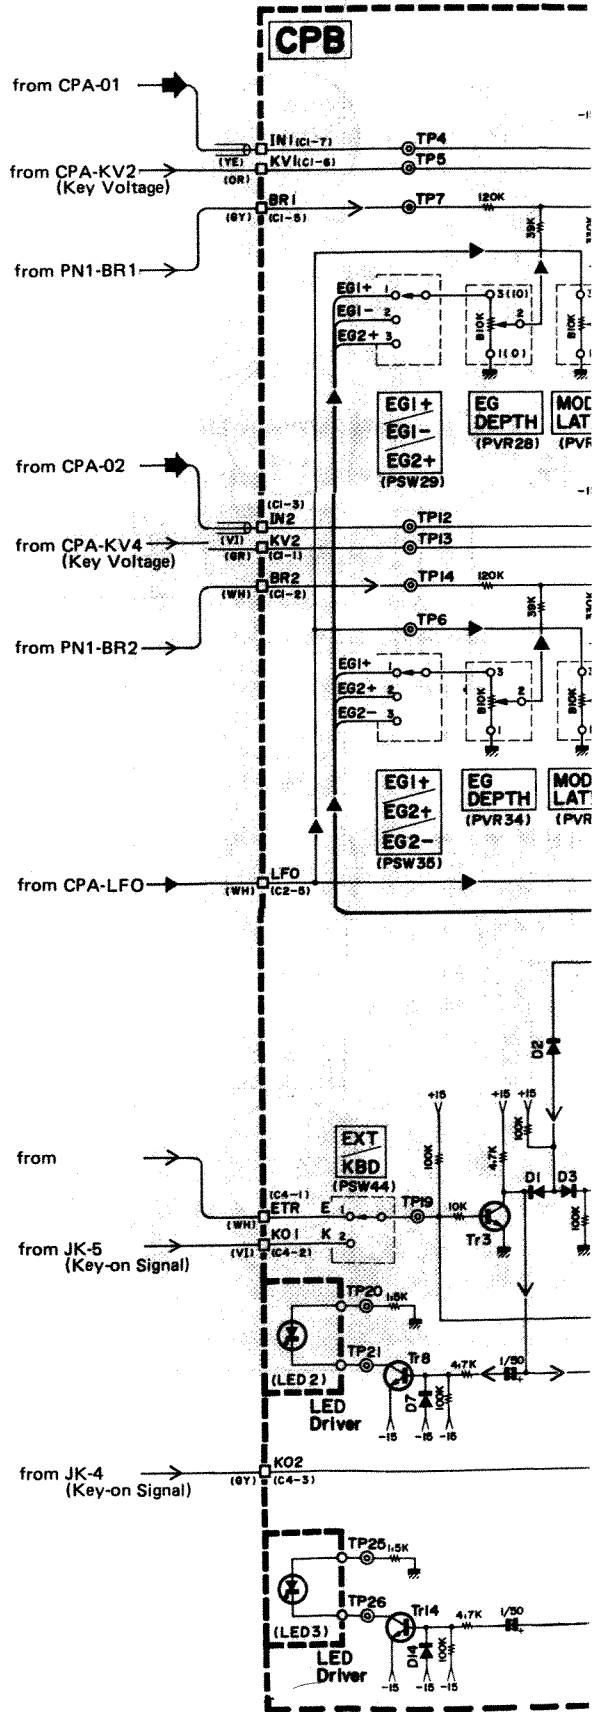

CPB Circuit Board

●VCA • IC (IG00151)

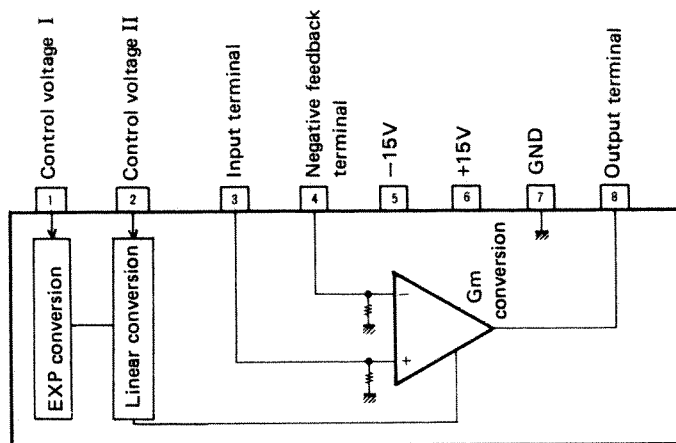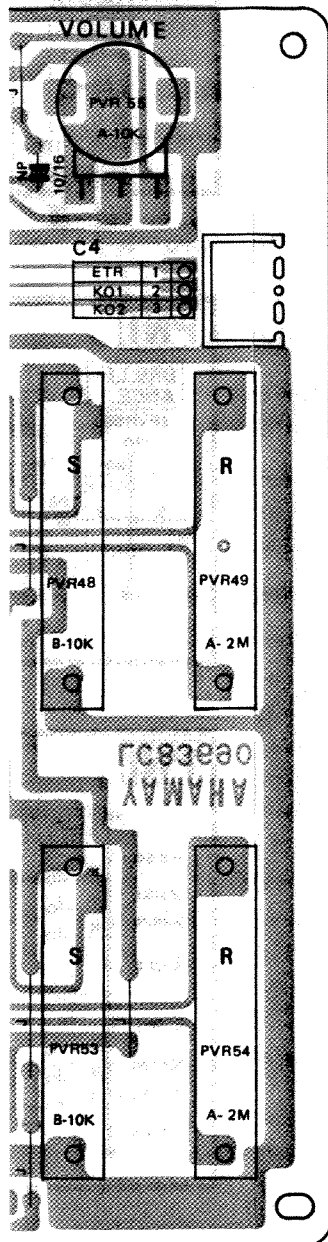


(IG00151)


1. EI. Level control voltage in
Control voltage comes in which varies level exponentially.



2. LI. Level control voltage in
Control voltage comes in which varies level linearly.

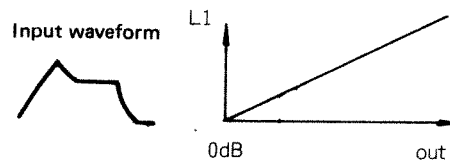


3. +IN. Input
Signal with modulated level comes in.

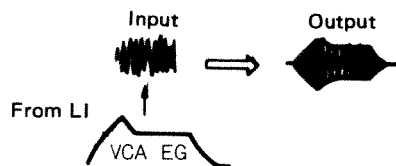


4. -IN. Negative feedback
Unused normally.
5. Vee. -15V input terminal
6. Vcc. +15V input terminal
7. GND. Ground
8. OUT. Output
Output current goes out.

Output waveform




Connect a 10k to 30k-ohm resistor during check.



PANEL LAYOUT

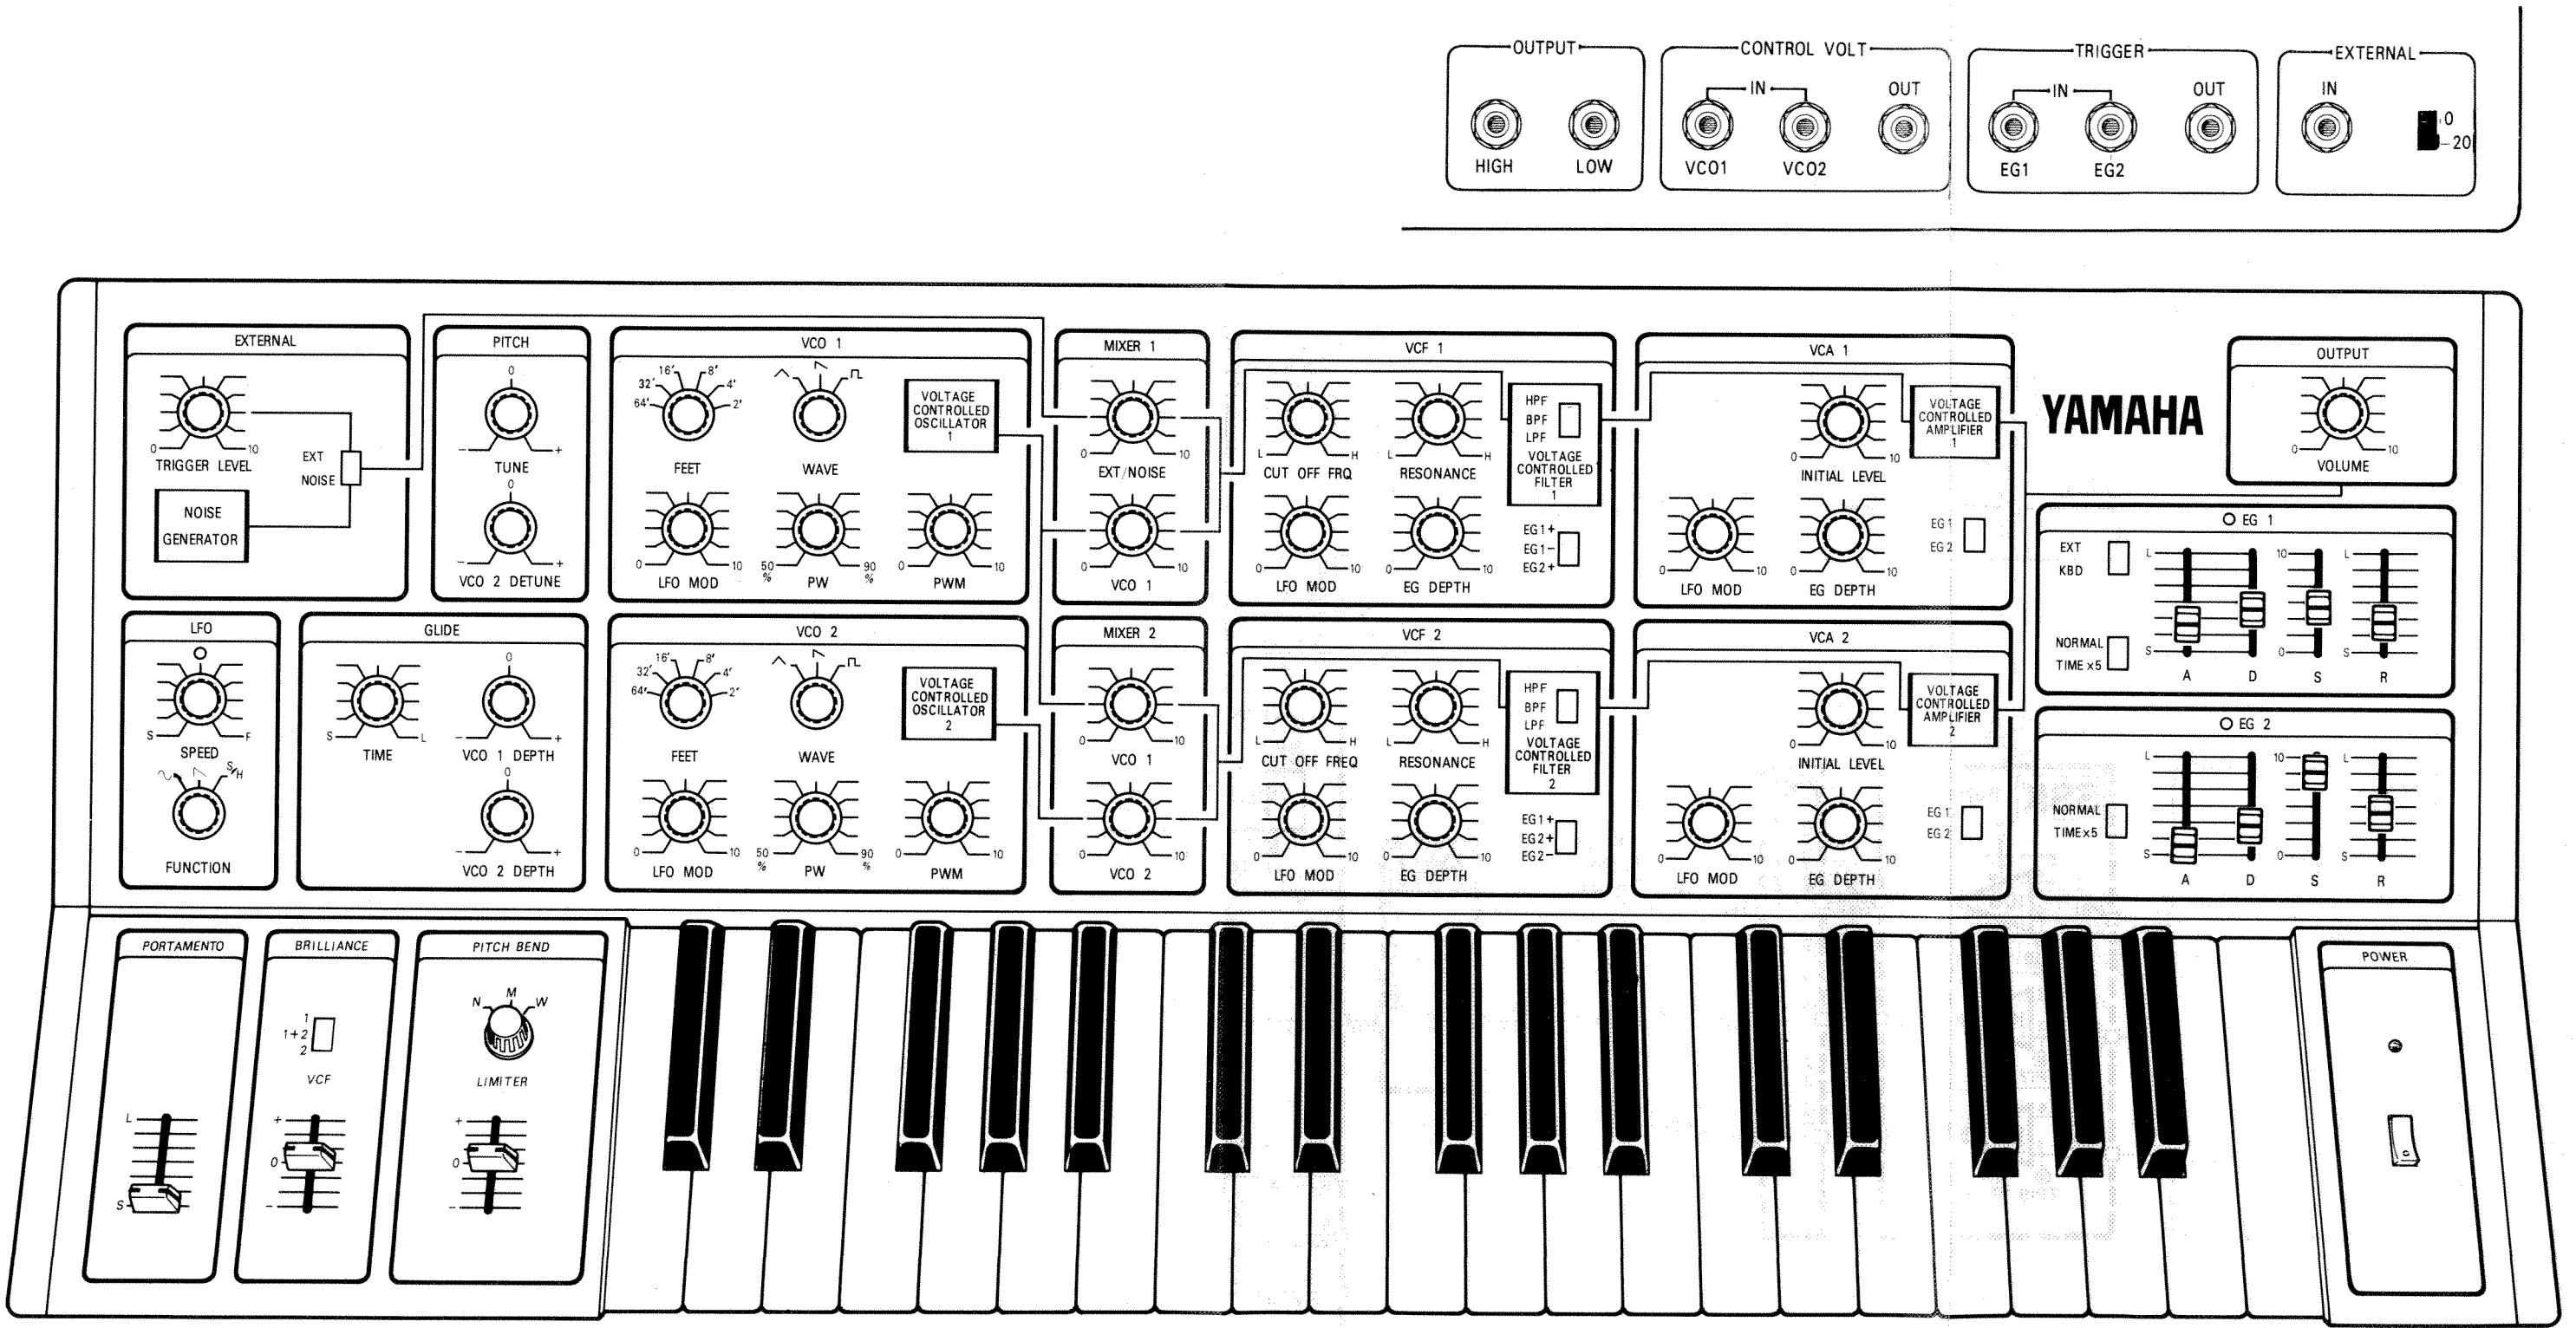

SSK Circuit Diagram

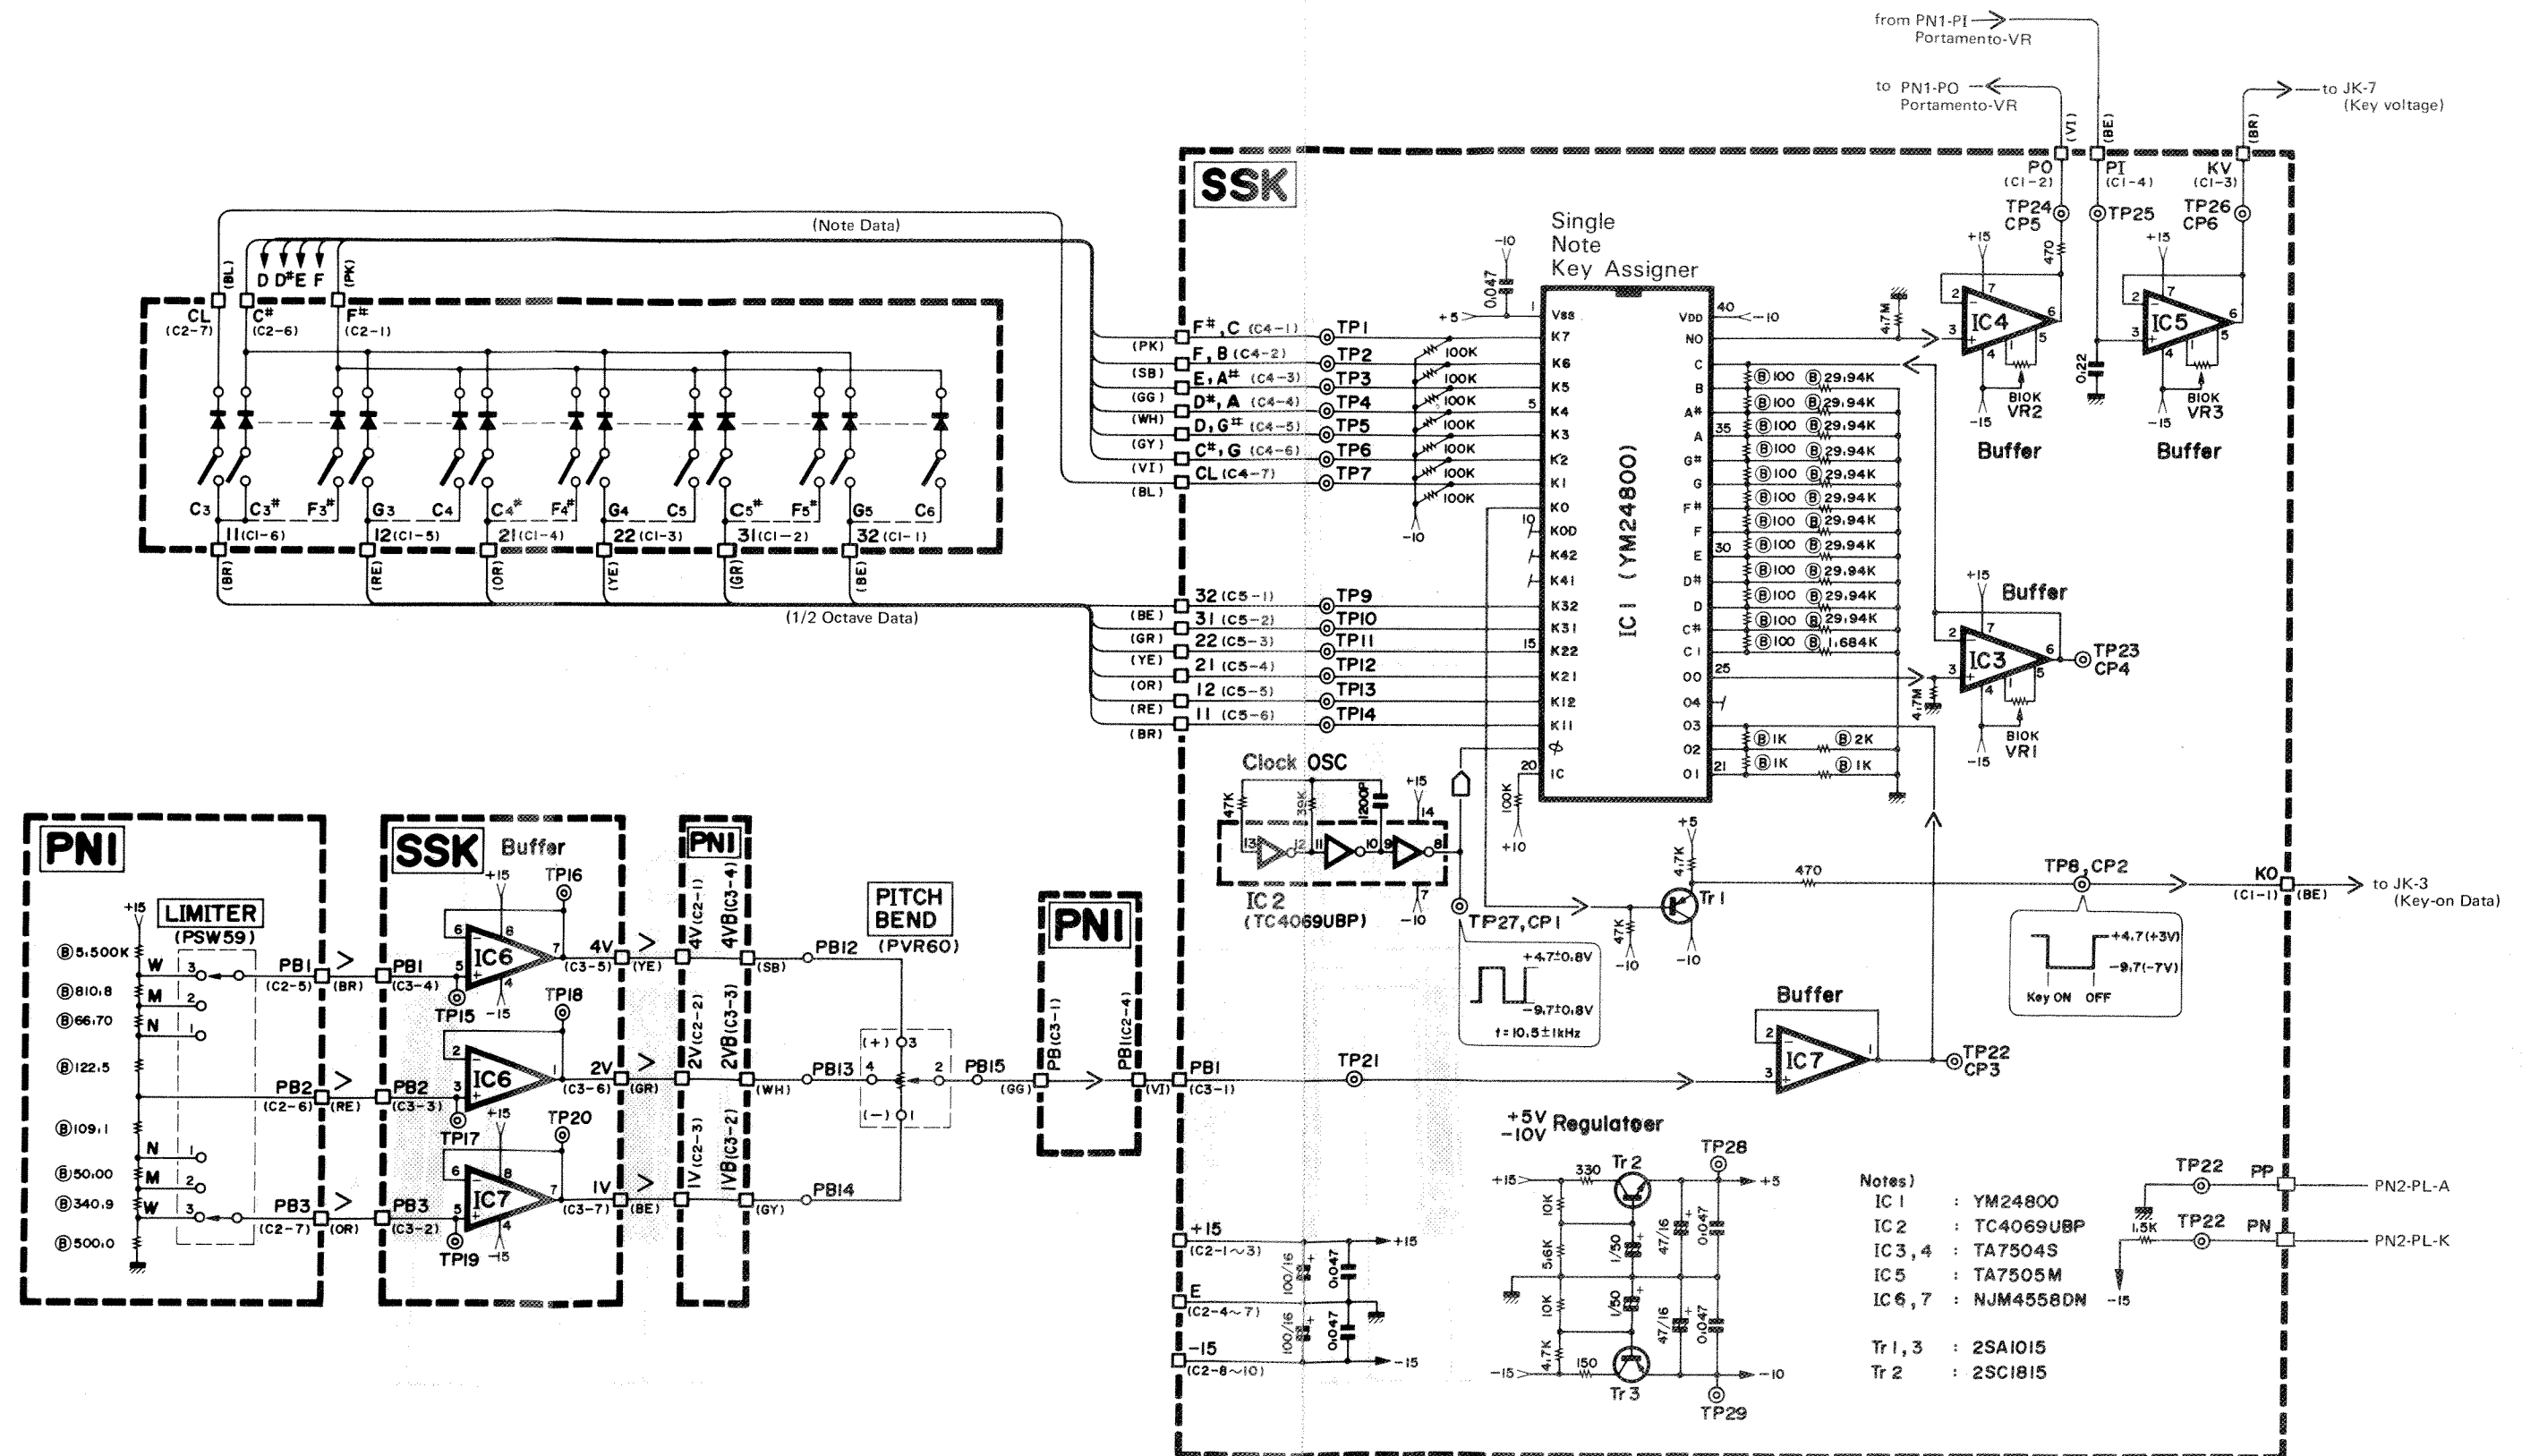

REAR PANEL Circuit Diagram, Circuit Board

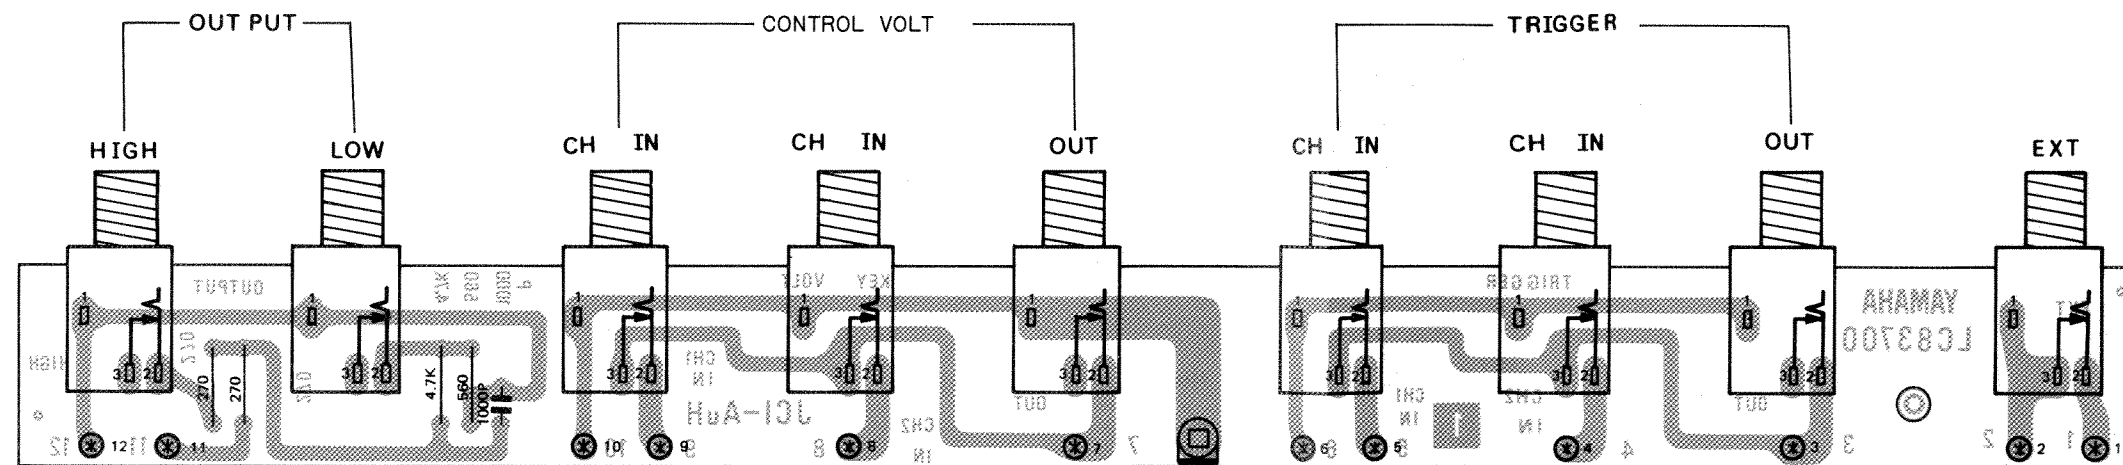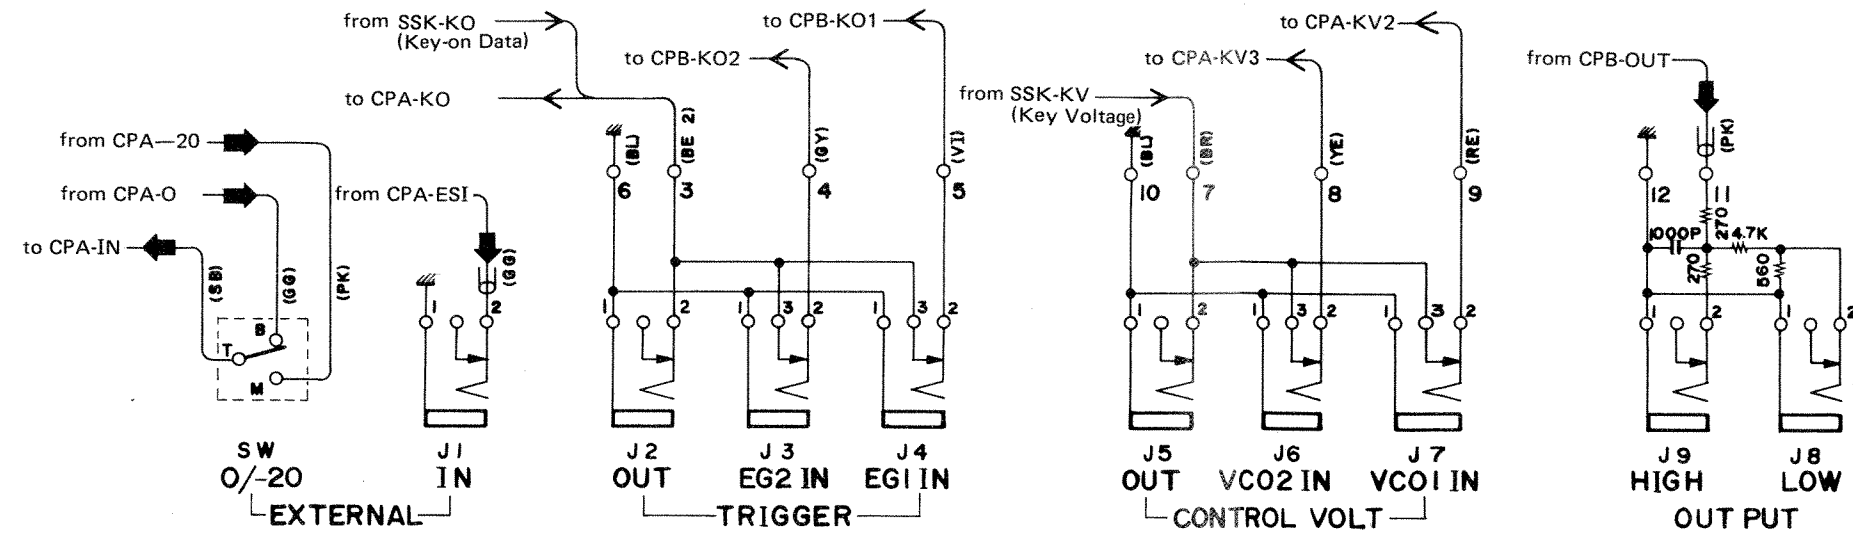

Note)

1. Printed Circuit Board LC83700

Electrical Checks & Adjustments

● REG CIRCUIT BOARD

1. $\pm 15V$ Power Supply

- Adjust VR12 on the REG Circuit Board so as to read $+15 \pm 0.01V$ in between terminals “+15V” and “E” (TP1 and TP2 on the CPA board).
- Similarly adjust VR13 on the REG board so as to read $-15 \pm 0.01V$ in between terminals “-15V” and “E” (TP3 and TP2 on the CPA board).

● SSK CIRCUIT BOARD

1. $+4.7V$ & $-9.7V$ Power Supply

- Read $+4.7 \pm 0.8V$ at TP28.
- Read $-9.7 \pm 0.8V$ at TP29.

2. Clock Oscillator

- The waveform given below should be at TP27 (CP1).

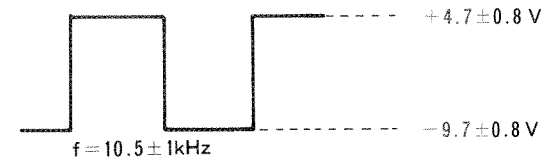


Fig. 1

3. Buffer Offset

- Set PORTAMENTO POT to S and turn on C3 key. Adjust VR1 so as to read $500 \pm 0.4mV$ at TR23 (CP4).
- In the same setting, adjust VR2 so as to read $250 \pm 0.4mV$ at TR24 (CP5).
- Similarly adjust VR3 so as to read $250 \pm 0.4mV$ at TR26 (CP6).
- Turn off C3 key and on C6 key, and read $2 \pm 0.001V$ at TP26 (CP6).

● CPA CIRCUIT BOARD

1. LFO

- Set SPEED control of LFO to S. Adjust VR3 to read $0.1 \pm 0.02\text{Hz}$ at TP11.
- Set SPEED control of LFO to F. Adjust VR2 to read $100 \pm 10\text{Hz}$ at TP11. A sawtooth wave should be at TP10.

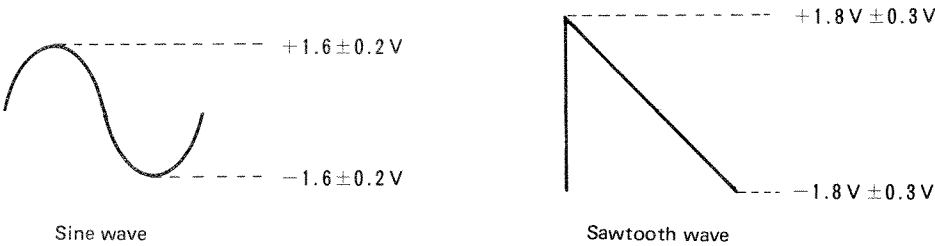


Fig. 2

2. EXTERNAL PREAMP and Trigger Circuit

- When 1kHz sine waves of $-30 \pm 1\text{dBm}$ are applied to terminal EXTERNAL IN, output level should be $-10 \pm 3\text{dBm}$ at TP5 and $10 \pm 3\text{dBm}$ at TP16.
- The waveform given below should be at TP8 when TRIGGER LEVEL control is moved from 0 to 10 and back again to 0 while 1kHz sine waves of $+15 \pm 1\text{dBm}$ are being applied to TP7.

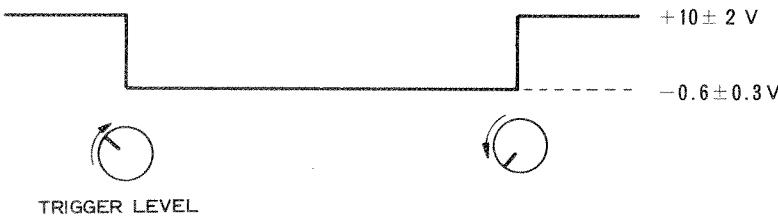


Fig. 3


3. Noise Generator and S/H Circuit

- Adjust VR1 so that the waveform given below be detected at TP9.



Fig. 4

SSK Circuit Board

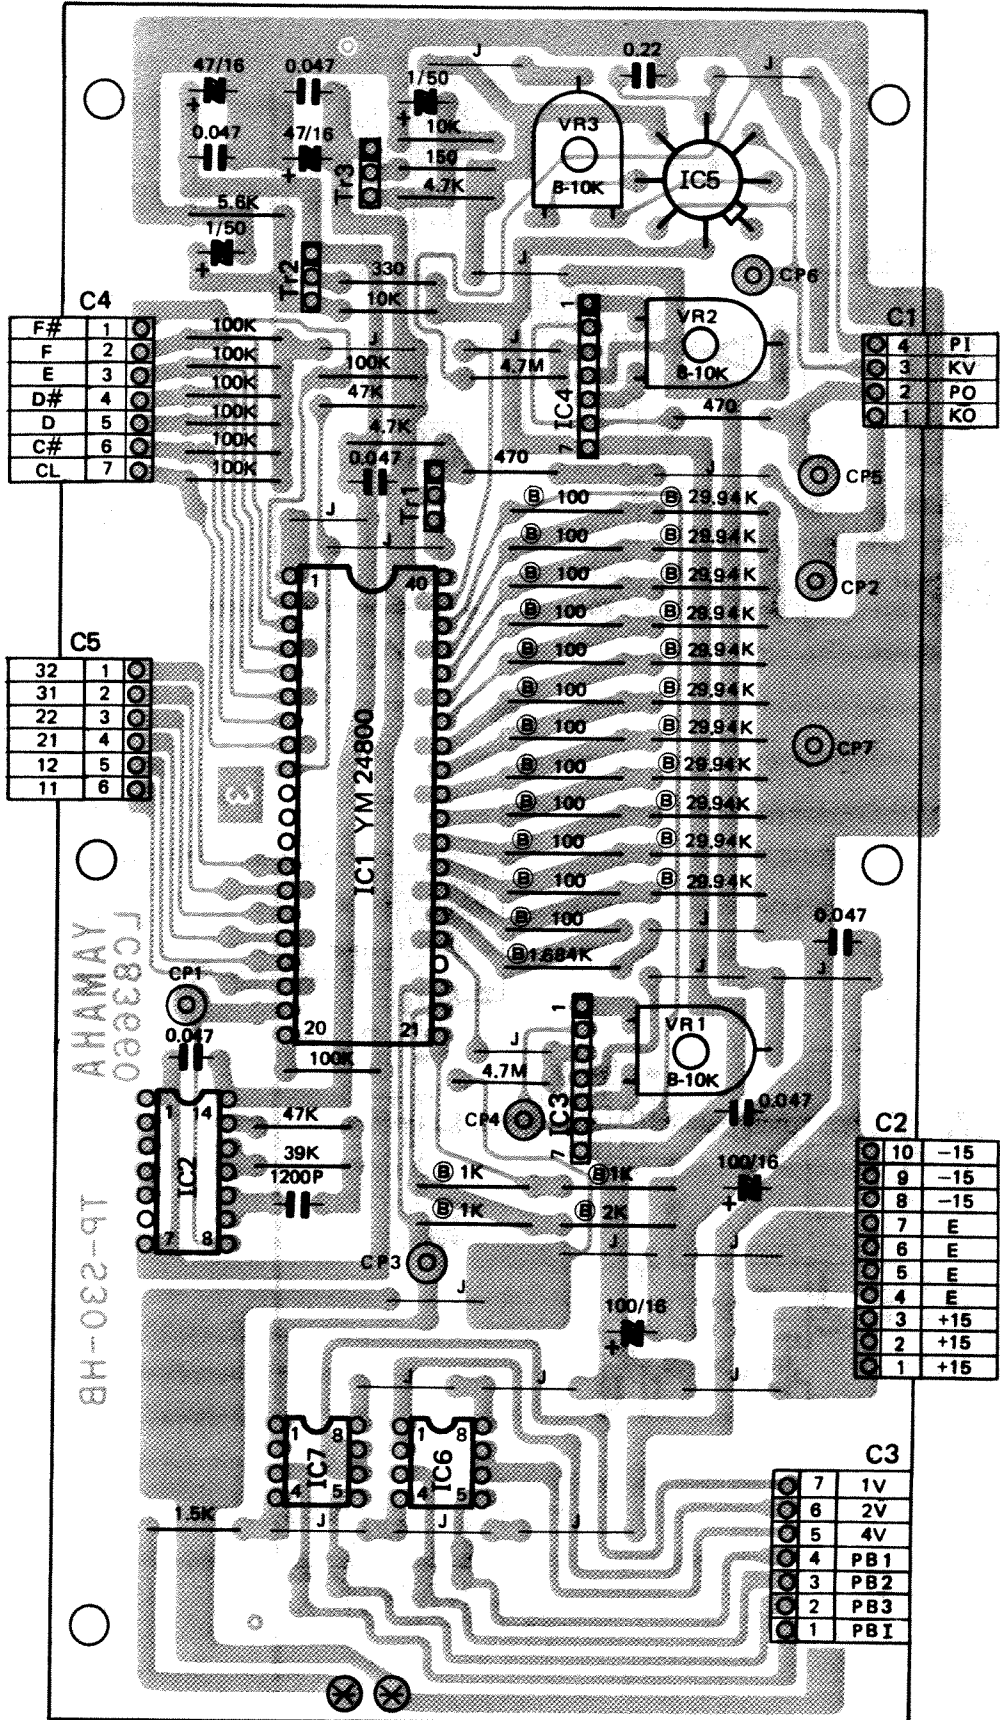

Note)


1. Printed Circuit Board' LC83660 ③
2. IC
- IC 1 : YM24800
- IC 2 : TC4069UBP
- IC 3, 4 : TA7504S
- IC 5 : TA7505M
- IC 6, 7 : NJM4558DN
3. Transistors
- Tr 1, 3 : 2SA1015 (Y)
- Tr 2 : 2SC1815 (Y)
4. Resistors
- Marked ⑧ : 0.1% metal film
5. Capacitors
- No mark : Ceramic
- Marked (マ) : Mylar

● YM24800


Terminal No.	Name	Description
①	Vss	+7.5V terminal (+5V in CS-5 and CS-15)
②	K7	F [#] , C Note ON Data INPUT
③	K6	F, B "
④	K5	E, A [#] "
⑤	K4	D [#] , A "
⑥	K3	D, G [#] "
⑦	K2	C [#] , G "
⑧	K1	Lowest C (CL) key input terminal
⑨	K0	Key on trigger
⑩	KOD	Key on data (unused in CS-5 and CS-15)
⑪	K42	37Keys 44keys G ₅ ~ C ₄ (Unused in 37key model)
⑫	K41	— —C ₅ ~ F ₅ (Unused in 37key model)
⑬	K32	G ₅ ~ C ₈ G ₄ ~ C ₅ 1/2 Octave ON Data INPUT
⑭	K31	C ₅ ~ F ₅ C ₄ ~ F ₄ "
⑮	K22	G ₄ ~ C ₅ G ₃ ~ C ₄ "
⑯	K21	C ₄ ~ F ₄ C ₃ ~ F ₃ "
⑰	K12	C ₃ ~ C ₄ G ₂ ~ C ₃ "
⑱	K11	C ₃ + C ₃ ~ F ₃ F ₂ ~ F ₂ "
⑲	∅	Clock pulse input terminal. Drives state counter.
⑳	IC	Initial clear. Initializes SSK when power switch is turned on.
㉑	01	Octave voltage input (lowest octave)
㉒	02	Octave voltage input
㉓	03	Octave voltage input
㉔	04	Octave voltage input (Highest octave) (Not provided in 37key model)
㉕	00	Octave voltage output
㉖	C1	C (1 Octave low) Key Voltage INPUT (Ladder resistor voltage)
㉗	C [#]	C [#] -Key Voltage Input (ladder resistor voltage)
㉘	D	D-key "
㉙	D [#]	D [#] -key "
㉚	E	E-key "
㉛	F	F-key "
㉜	F [#]	F [#] -key "
㉝	G	G-key "
㉞	G [#]	G [#] -key "
㉟	A	A-key "
㊱	A [#]	A [#] -key "
㊲	B	B-key "
㊳	C	C-key "
㊴	NO	Keyboard voltage output
㊵	VDD	-7.5V terminal (-10V in CS-5 and CS-15)

SSK C/B
PAGE 7

CPA Circuit Diagram

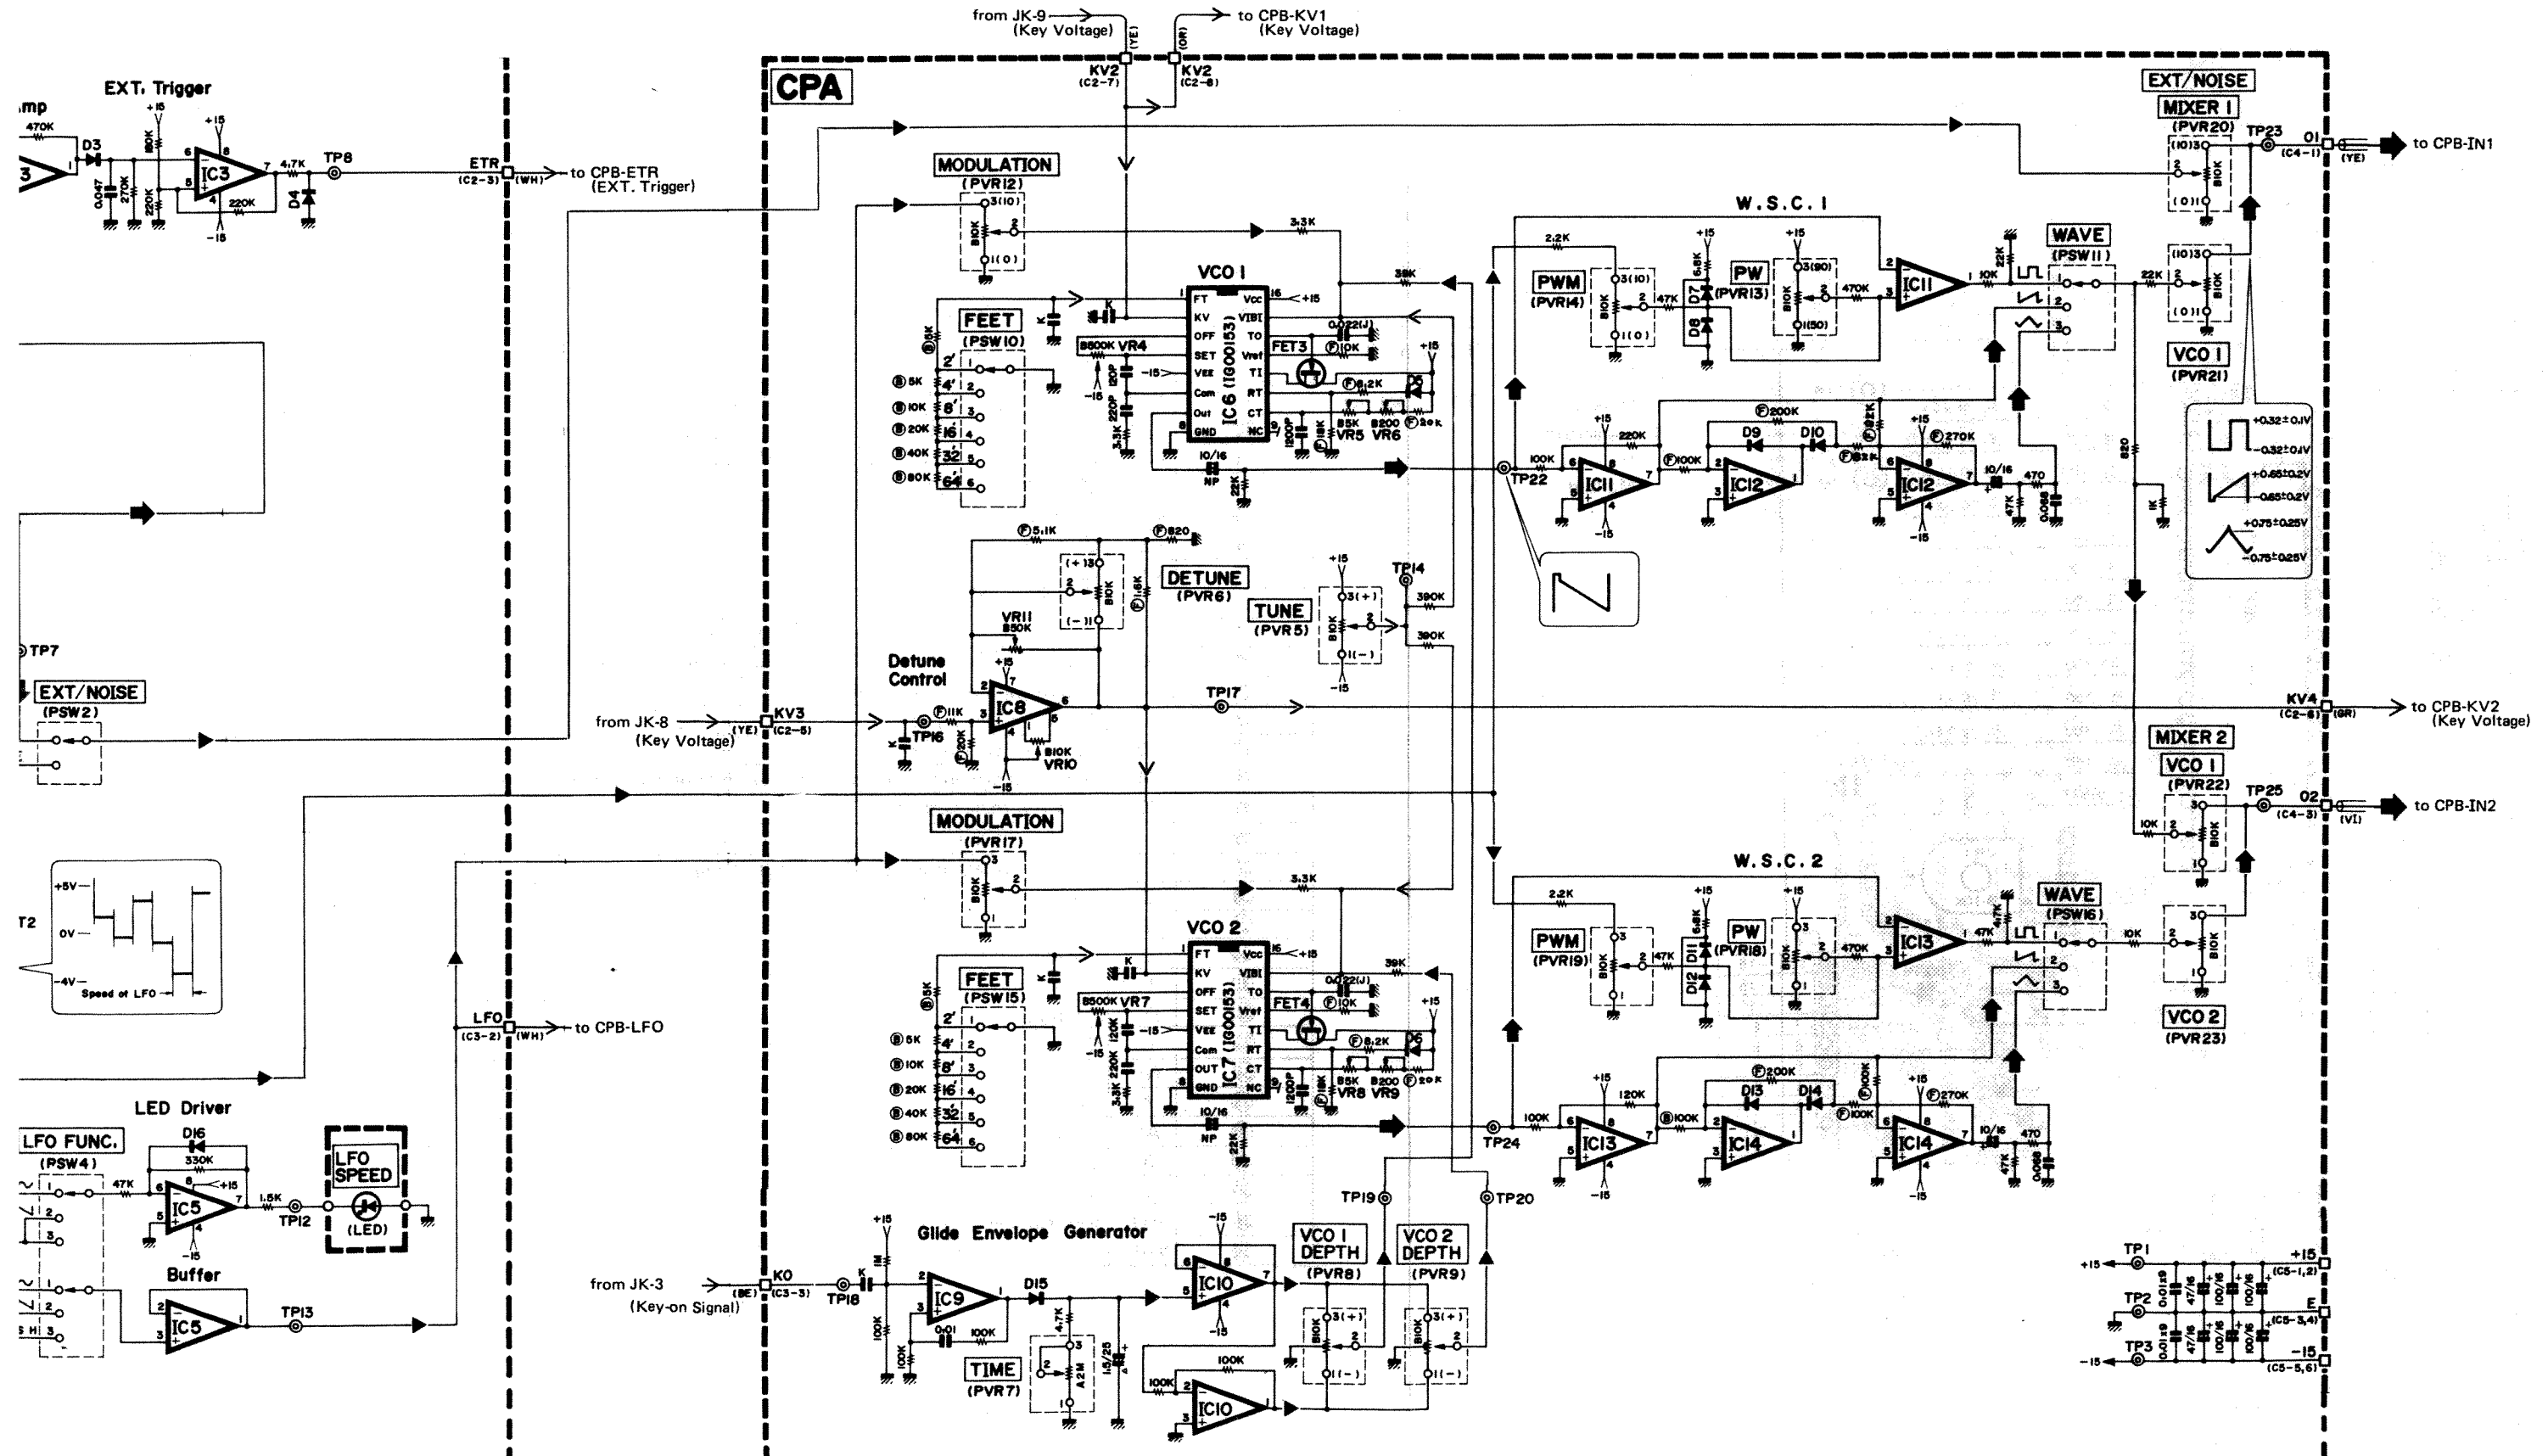

C3	1	
	2	LFO
	3	KO

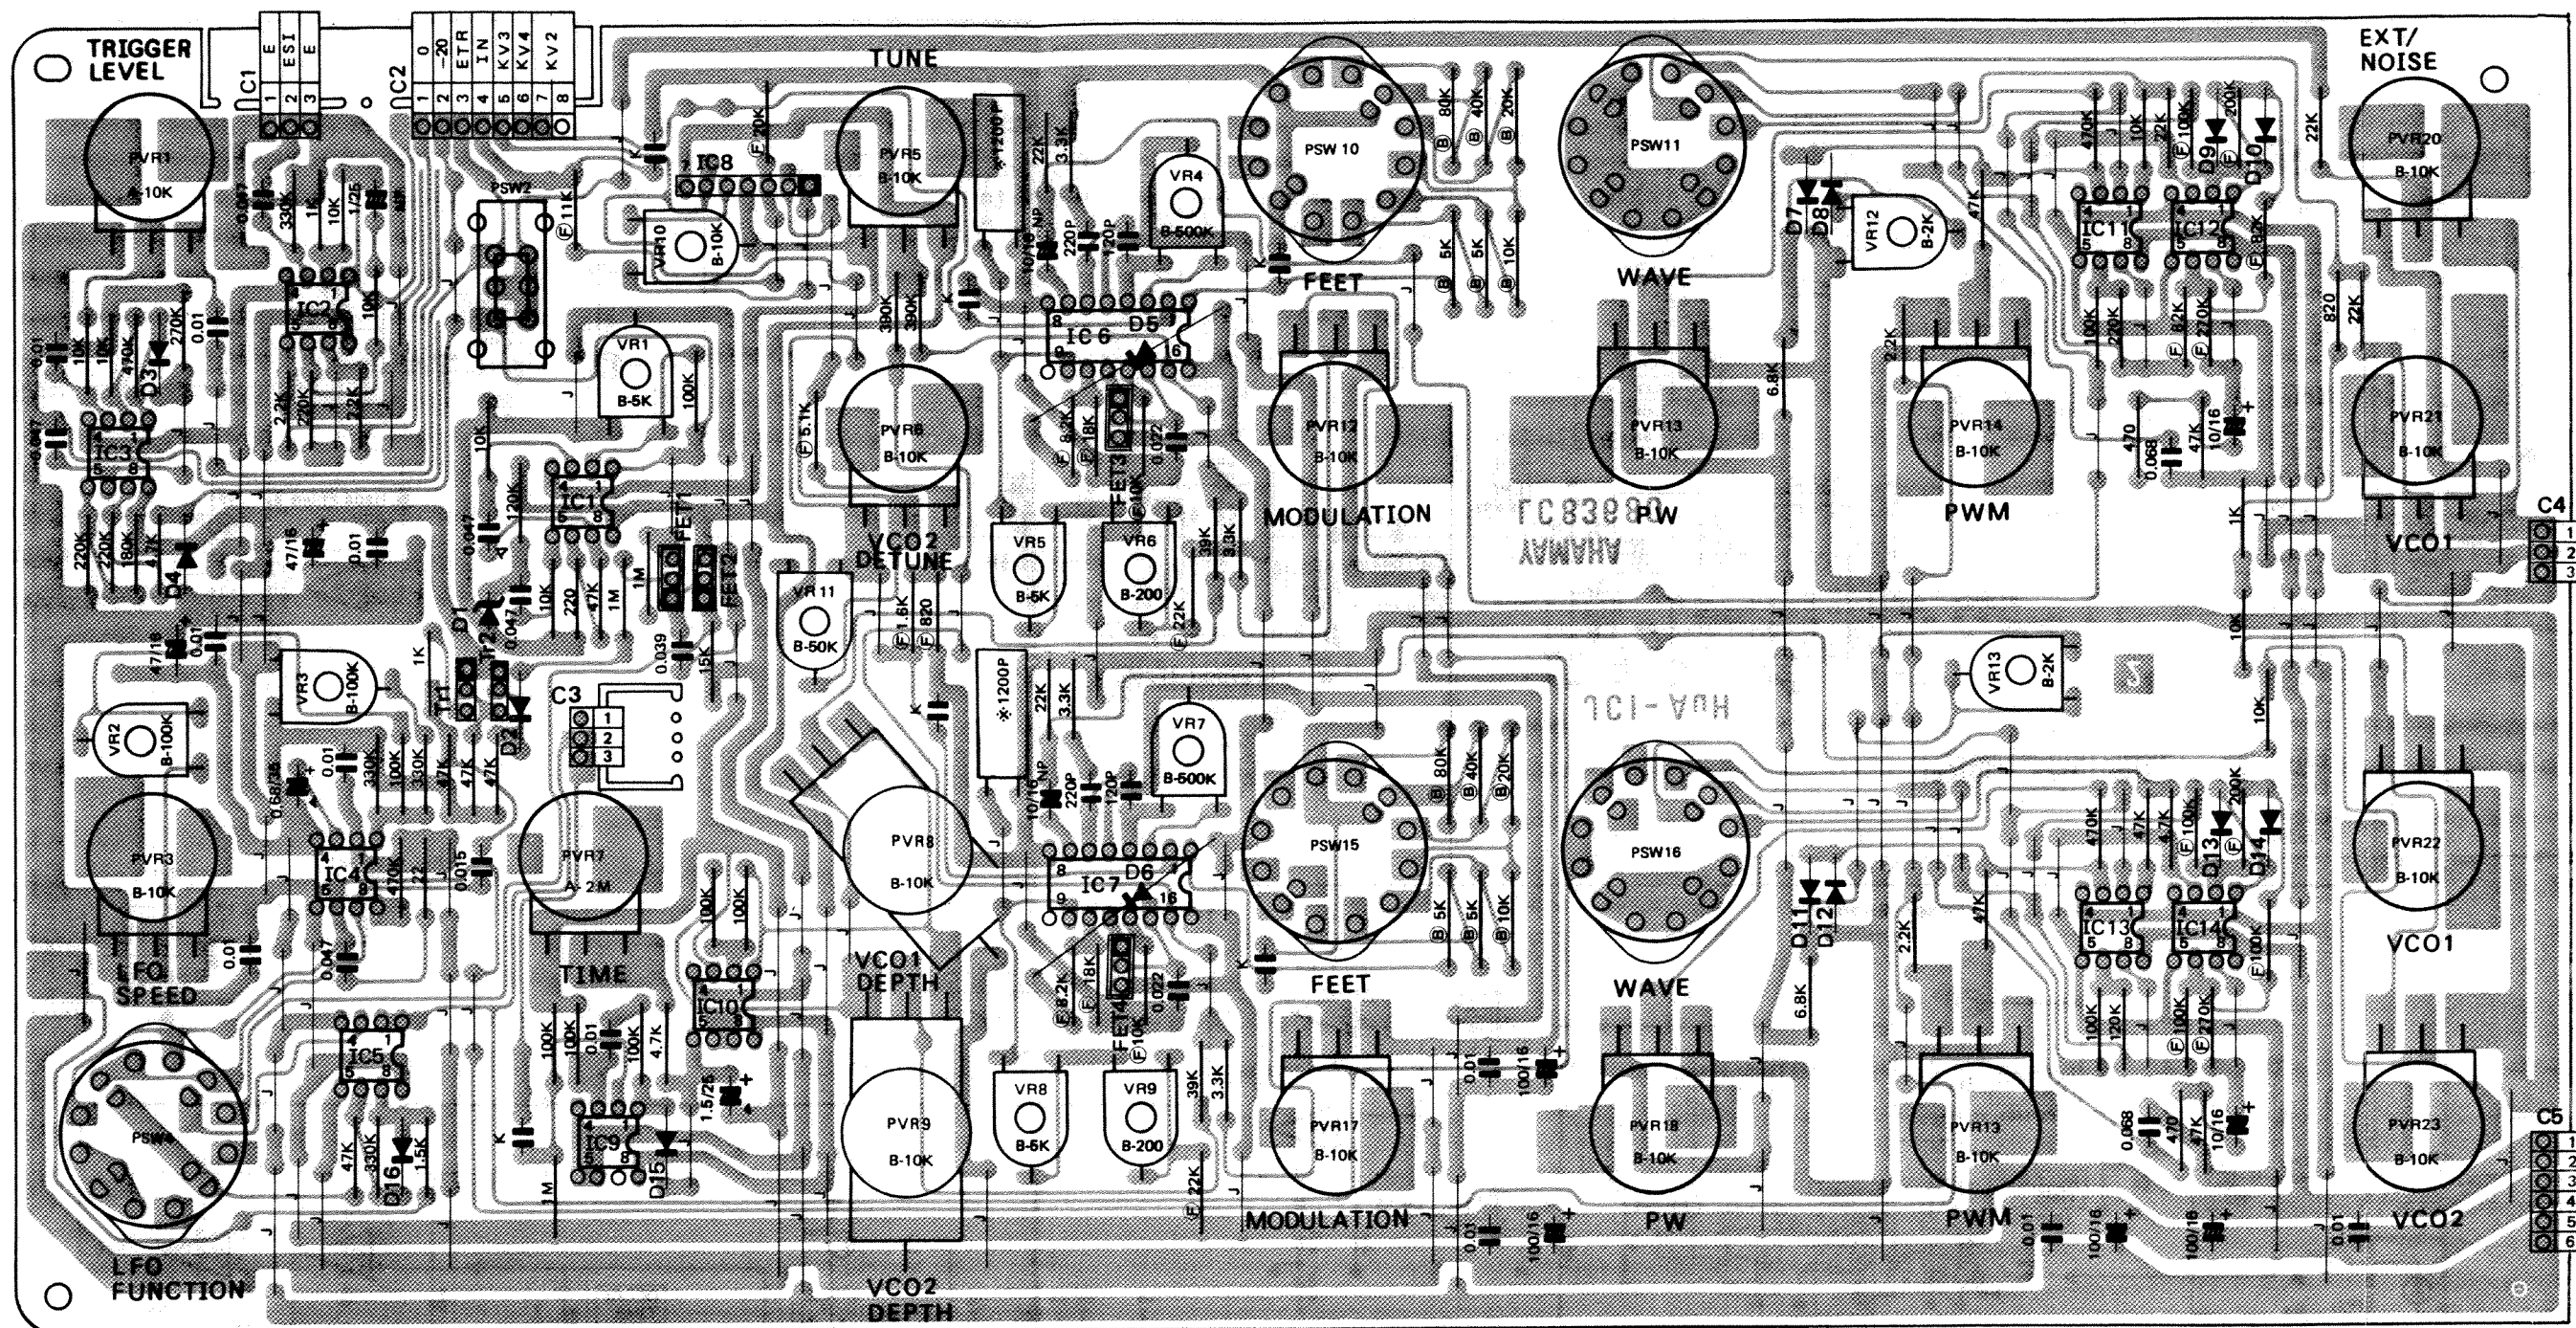


Note)

1. Printed Circuit Board LC83680 ②
2. IC 1 ~ 3, 5, 9 ~ 14 : NJM4558DN
IC 4 : IG00150
IC 6,7 : IG00153
IC 8 : TA7504S
3. Transistors
Tr 1,2 : 2SA1015 (Y)
4. FET
FET 1, 3, 4 : 2SK30A (Y)
FET 2 : 2SK105 (E)


5. Diodes
D 1 : 1S1715P
D 2 ~ 16 : 1S1555
6. Resistors
Marked ⑥ : 0.1% metal film
Marked ⑦ : 1% metal film

7. Capacitors
Marked * : Moistureproof polyethylene
Marked "マ" : Mylar
Marked K : 1,000pF
Marked Δ : Tantalum
No mark : Ceramic

CPB Circuit Diagram

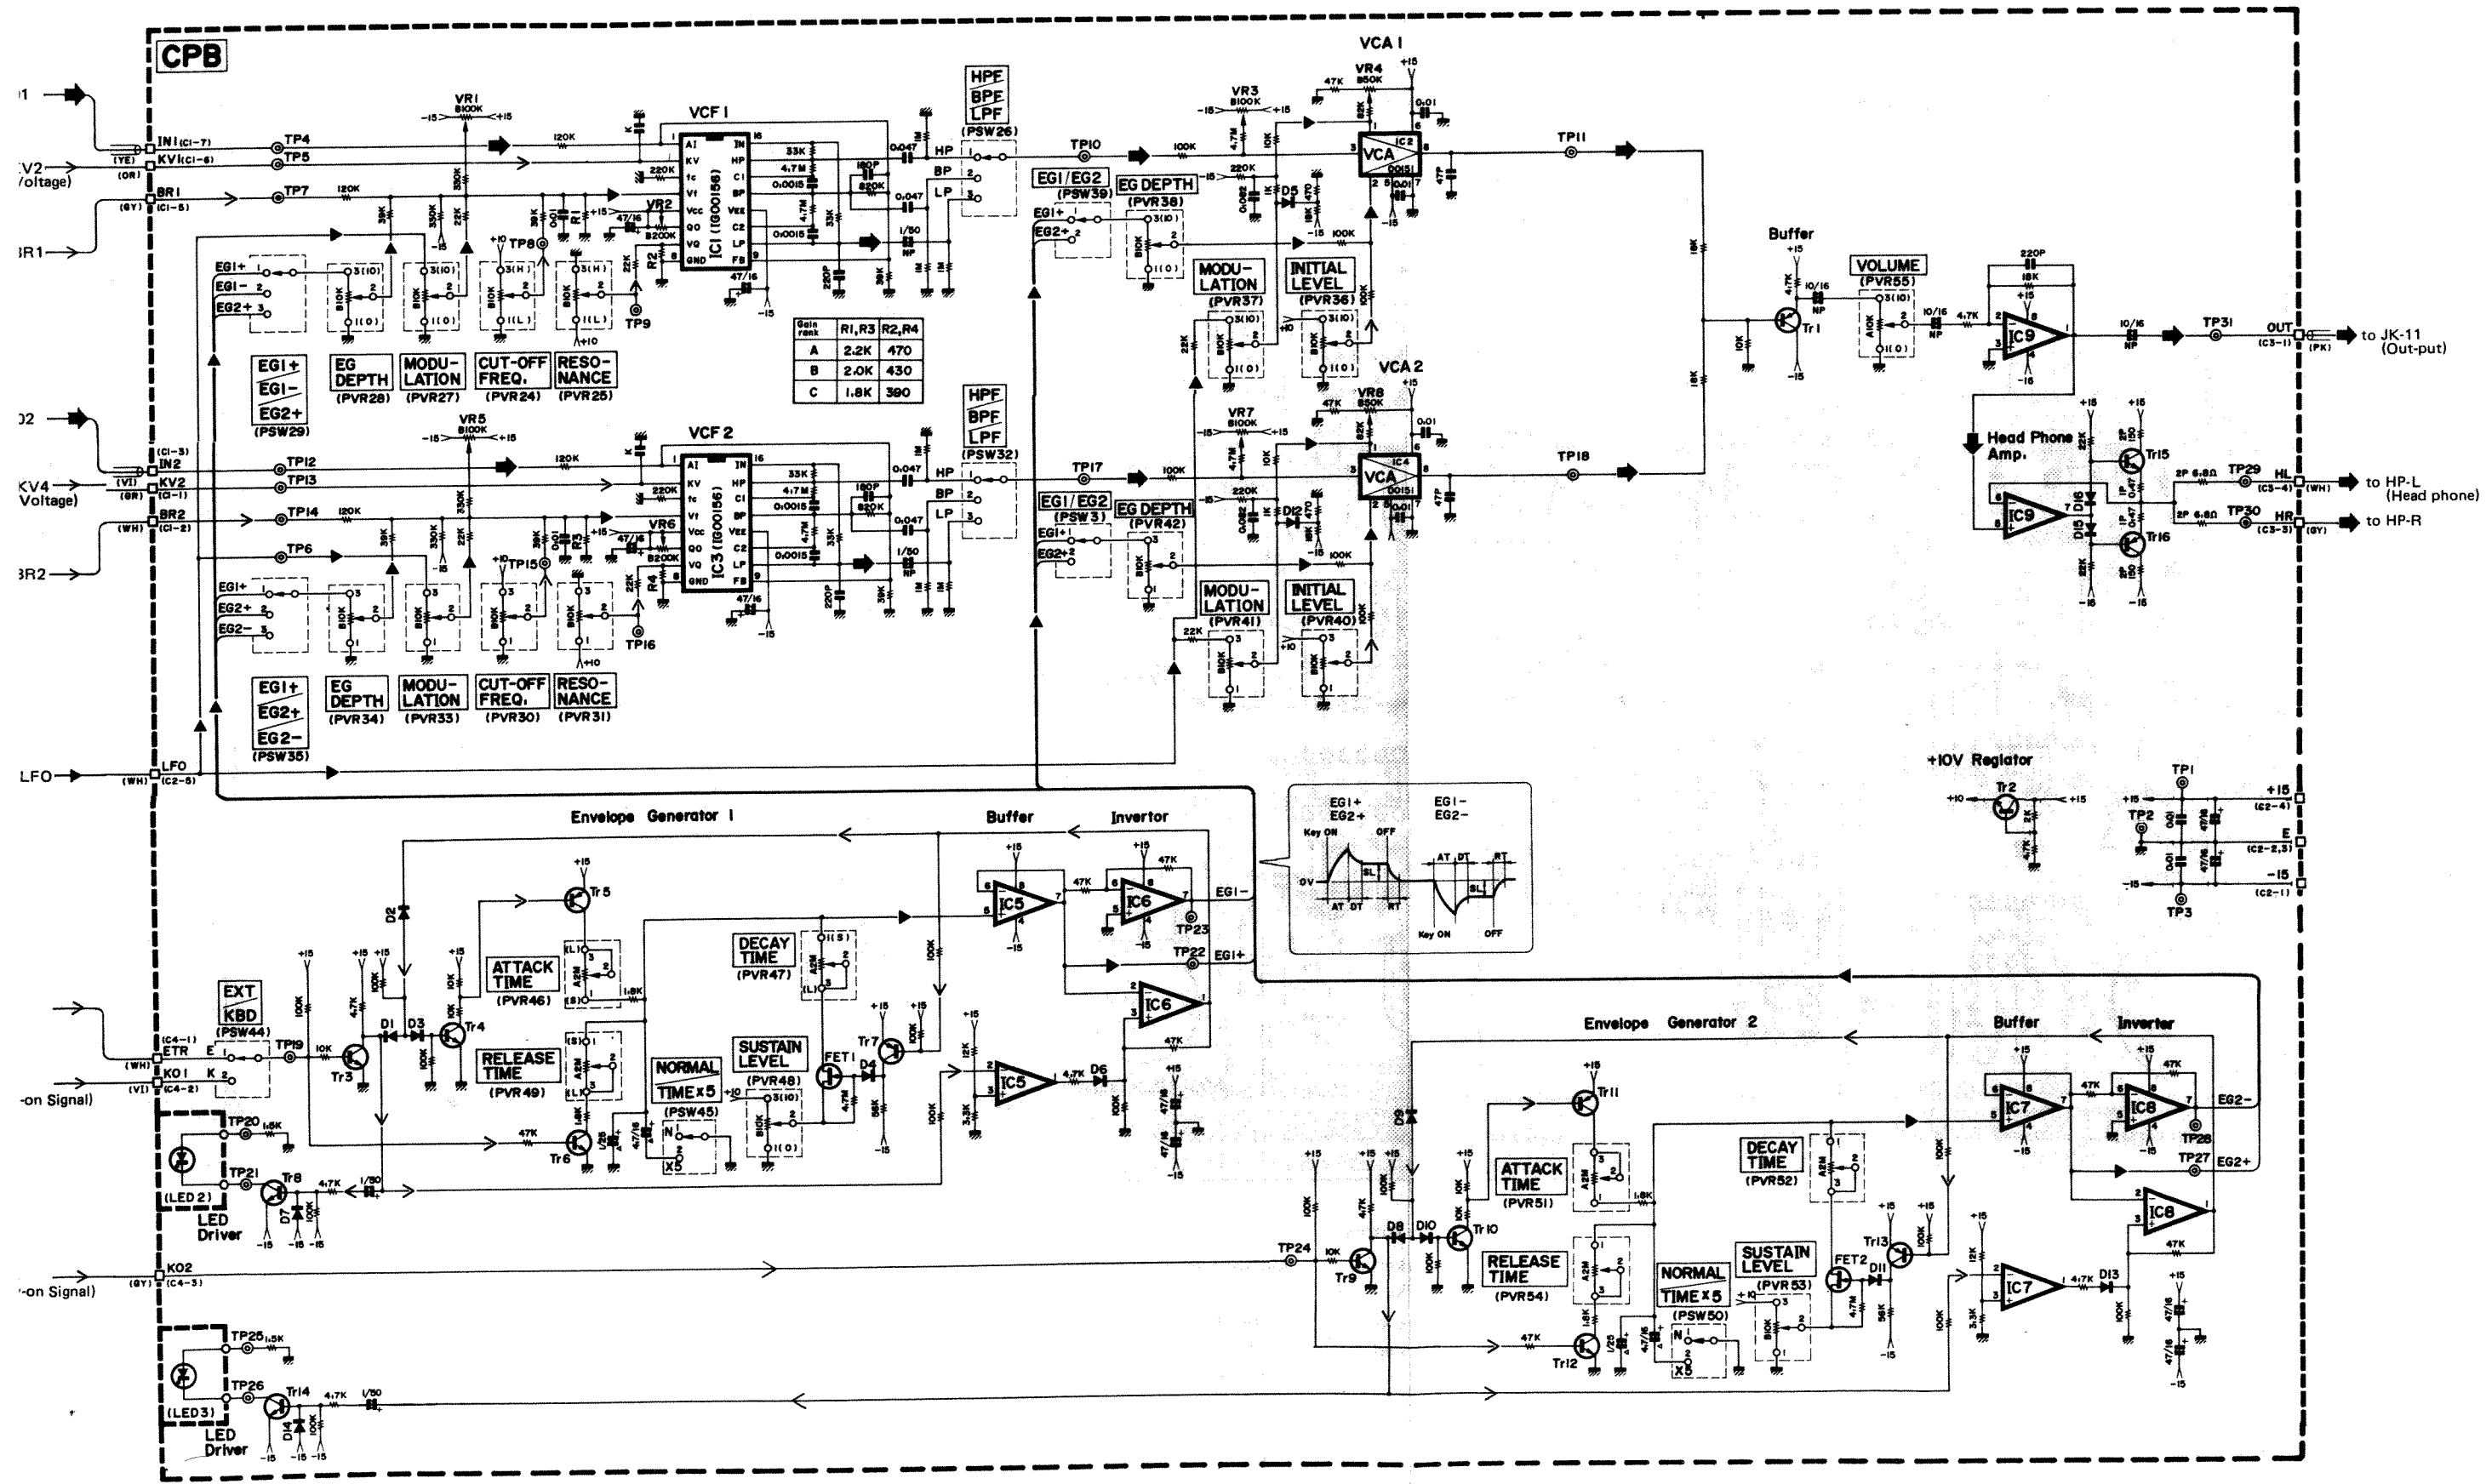

C3	E	5
	HL	4
	HR	3
	E	2
	OUT	1

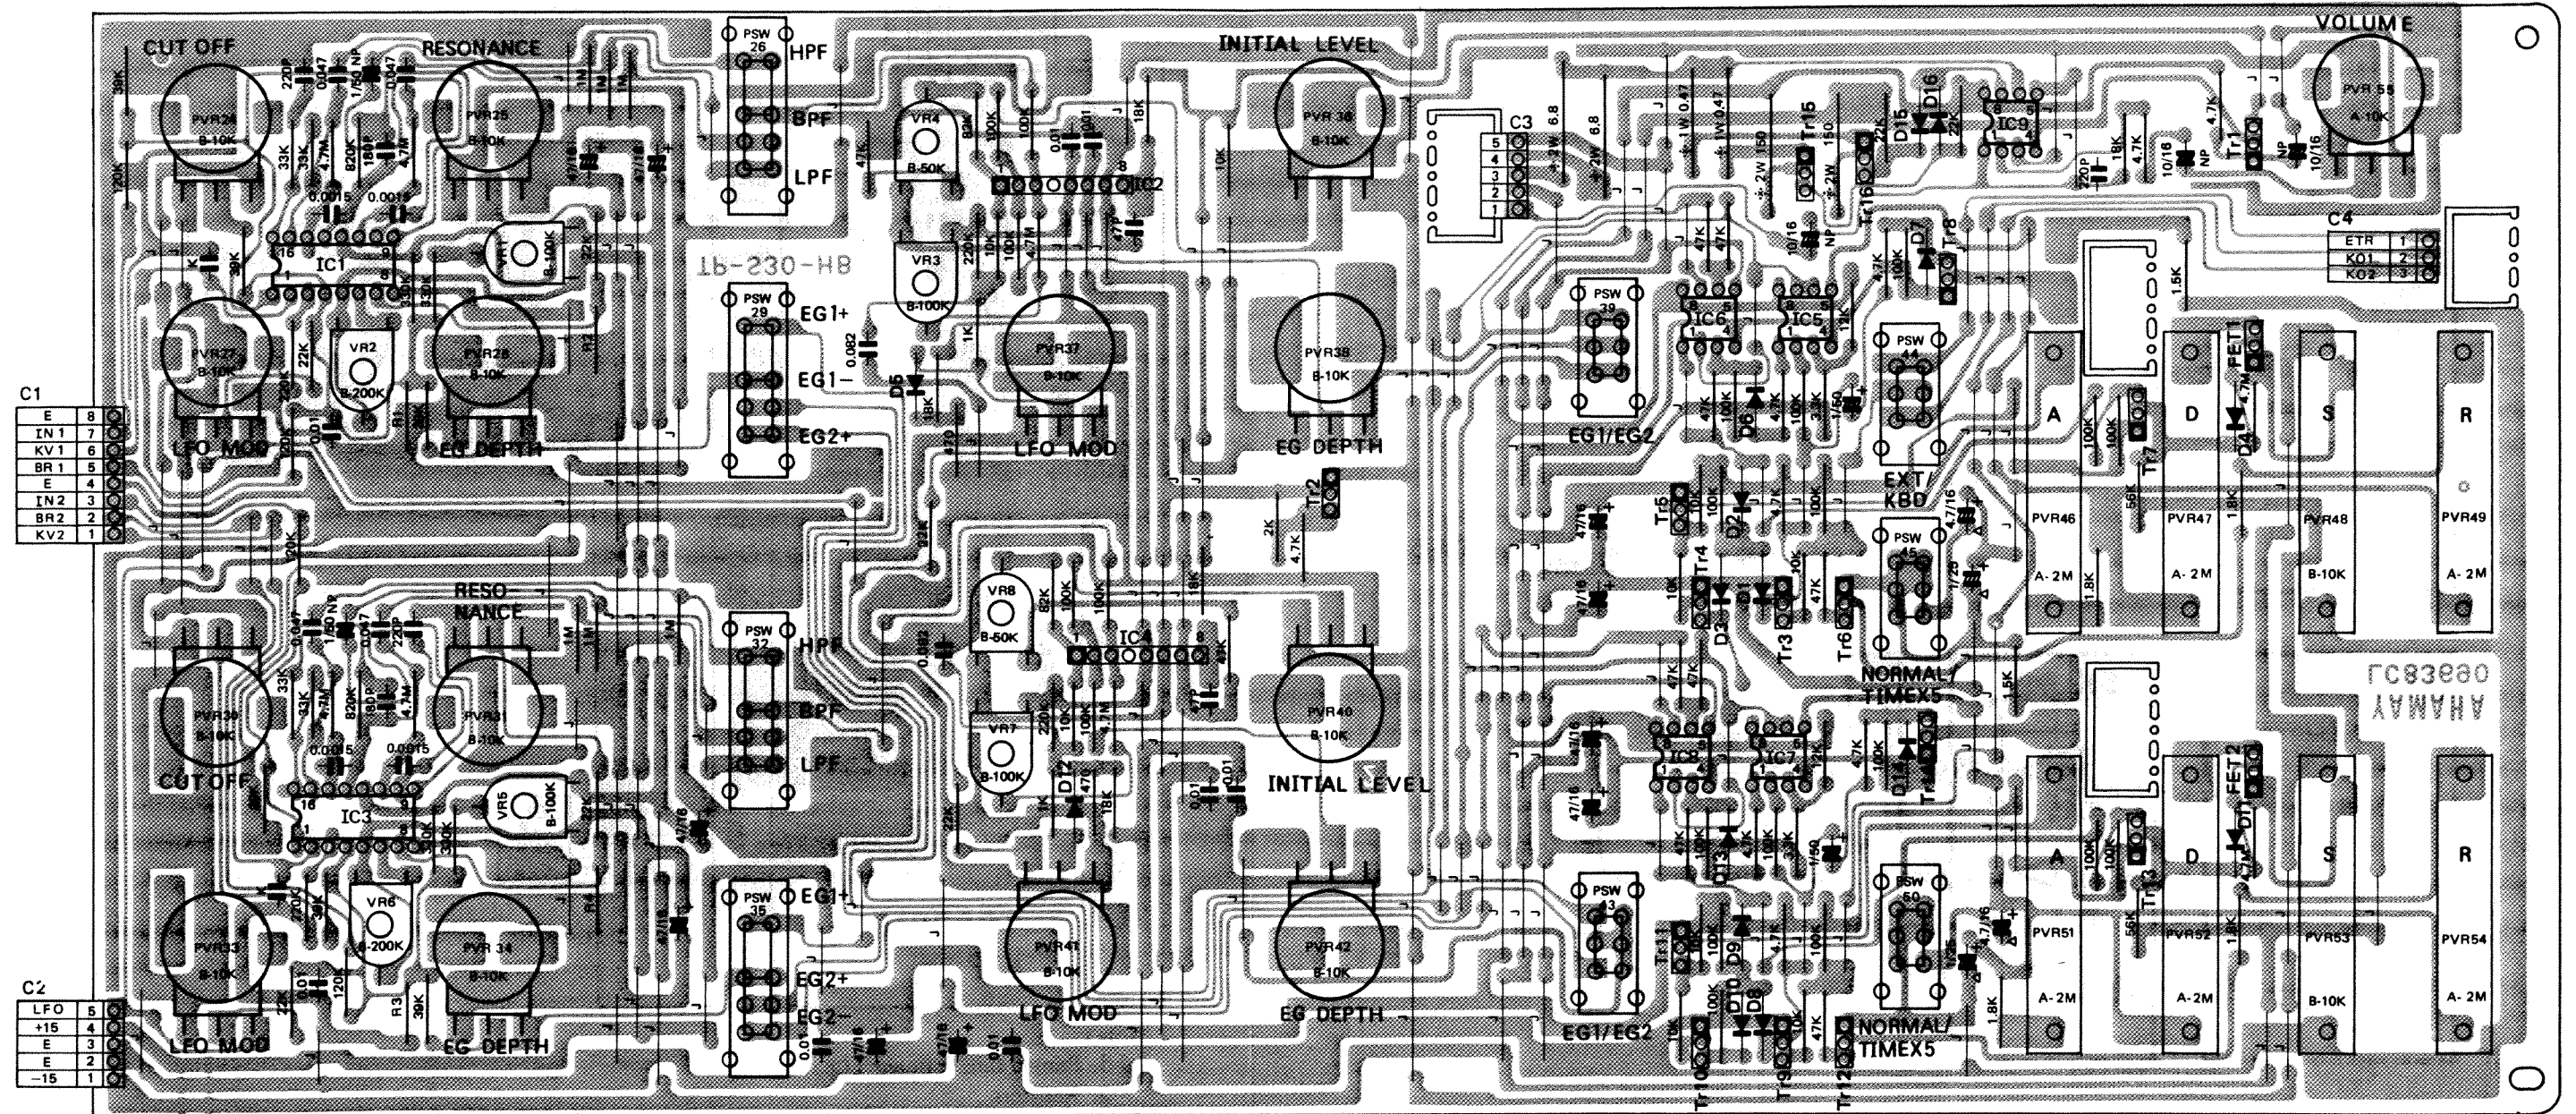

Note)

- Printed Circuit Board LC83690 ②
- IC 1, 3 : IG00156
IC 2, 4 : IG00151
IC 5 ~ 9 : JNM4558DN
- Transistors
Tr 1, 5, 7, 11 13 : 2SA1015 (Y)
Tr 2, 3, 4, 6
8 ~ 10, 12, 14 : 2SC1815 (Y)
Tr 15 : 2SC509 (Y)
Tr 16 : 2SA509 (Y)



- Diodes
D 1 ~ D 16 : 1S1555
- FET
FET 1, 2 : 2SK30A (Y)

- Resistors
Marked * : Metal oxide film resistor
The values of R1 thru R4 depend on the rank of the IC as follows.

IG00156	R1, R3	R2, R4
A	2.2K	470
B	2.0K	430
C	1.8K	390

- Capacitors
Marked " " : Mylar capacitor
Marked $\triangle$: Tantalum capacitor
Marked K : 1,000pF ceramic capacitor
No mark : Ceramic capacitor

PN1 Circuit Diagram, Circuit Board

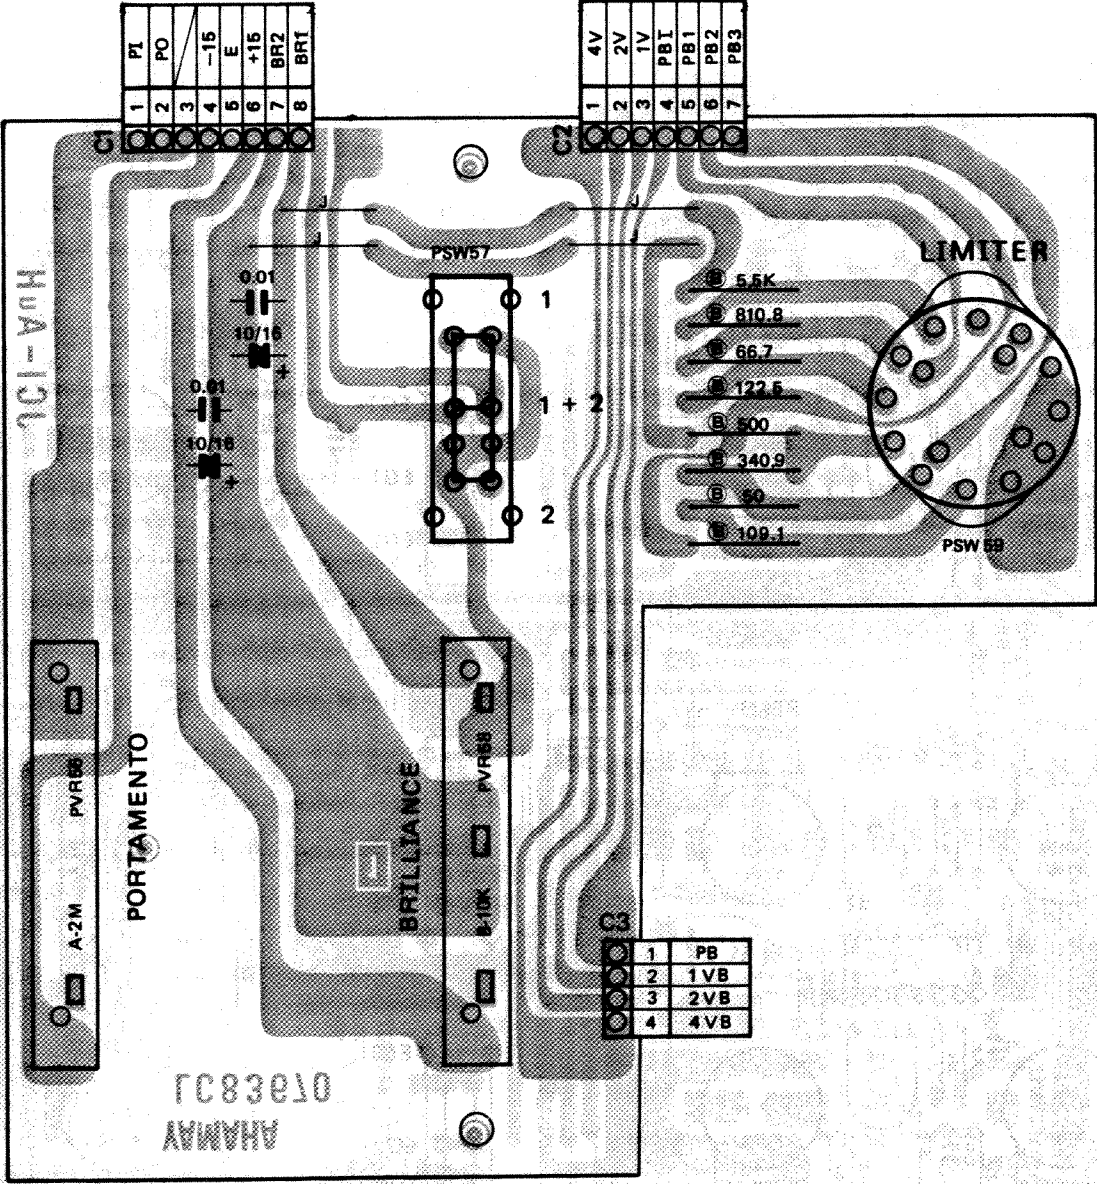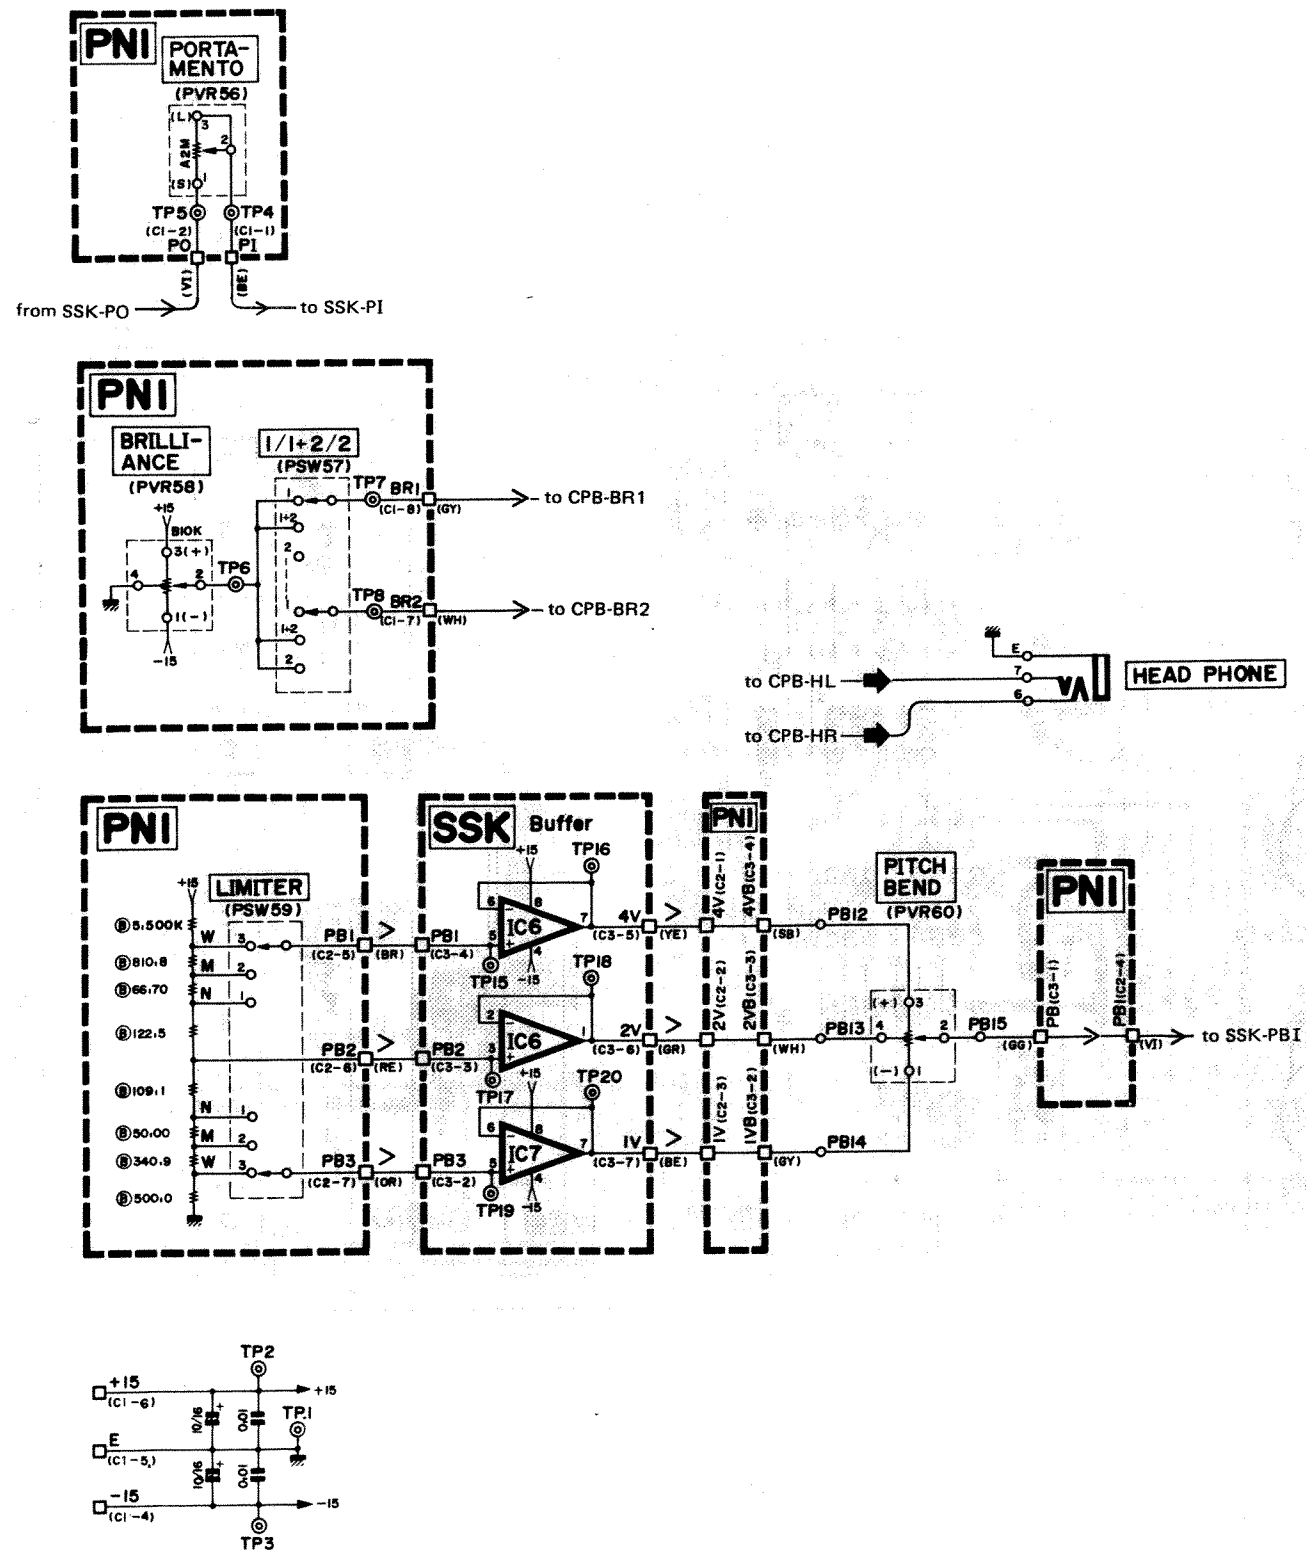

- Note)
1. Printed Circuit Board LC83670 ①
 2. Resistors
Marked ⑥ : 0.1% metal film